

HEAT SHRINK EU KIT



+ INFORMATION

- + High quality 2:1 ratio heat shrink tubing in a wide range of sizes
- + Assortment packs with a variety of colours, ready to use
- + Identical specification to our standard HS heat shrink range



+ ORDERING INFORMATION

| PART REF     | SIZE (mm) | CONTENTS                                   |
|--------------|-----------|--------------------------------------------|
| HS KIT1 3.2  | 3.2/1.6   | Contains 3 X 250mm lengths of each colour* |
| HS KIT1 4.8  | 4.8/2.4   |                                            |
| HS KIT1 6.4  | 6.4/3.2   |                                            |
| HS KIT1 9.5  | 9.5/4.7   |                                            |
| HS KIT1 12.7 | 12.7/6.3  |                                            |
| HS KIT1 19.1 | 19.1/9.5  | Contains 2 X 250mm lengths of each colour* |
| HS KIT1 25.4 | 25.4/12.7 |                                            |
| HS KIT1 38.1 | 38.1/19.0 |                                            |

\* black, blue, grey, brown and earth.

+ RELATED PRODUCTS



HG2 - Hot air gun

▶ PAGE 60



+ INFORMATION

- + High quality 2:1 ratio heat shrink tubing in a wide range of sizes
- + Assortment packs with a variety of colours, ready to use
- + Identical specification to our standard HS heat shrink range



+ ORDERING INFORMATION

| PART REF     | SIZE (mm) | CONTENTS                                   |
|--------------|-----------|--------------------------------------------|
| HS KIT2 3.2  | 3.2/1.6   | Contains 2 X 250mm lengths of each colour* |
| HS KIT2 4.8  | 4.8/2.4   |                                            |
| HS KIT2 6.4  | 6.4/3.2   |                                            |
| HS KIT2 9.5  | 9.5/4.7   |                                            |
| HS KIT2 12.7 | 12.7/6.3  |                                            |
| HS KIT2 19.1 | 19.1/9.5  |                                            |
| HS KIT2 25.4 | 25.4/12.7 |                                            |
| HS KIT2 38.1 | 38.1/19.0 |                                            |

\* red, yellow, green, black, blue, grey, brown, white, clear and earth.


+ RELATED PRODUCTS



HG2 - Hot air gun

▶ PAGE 60

HEAT SHRINK TUBING - ADHESIVE LINED 1.2 METRE LENGTHS

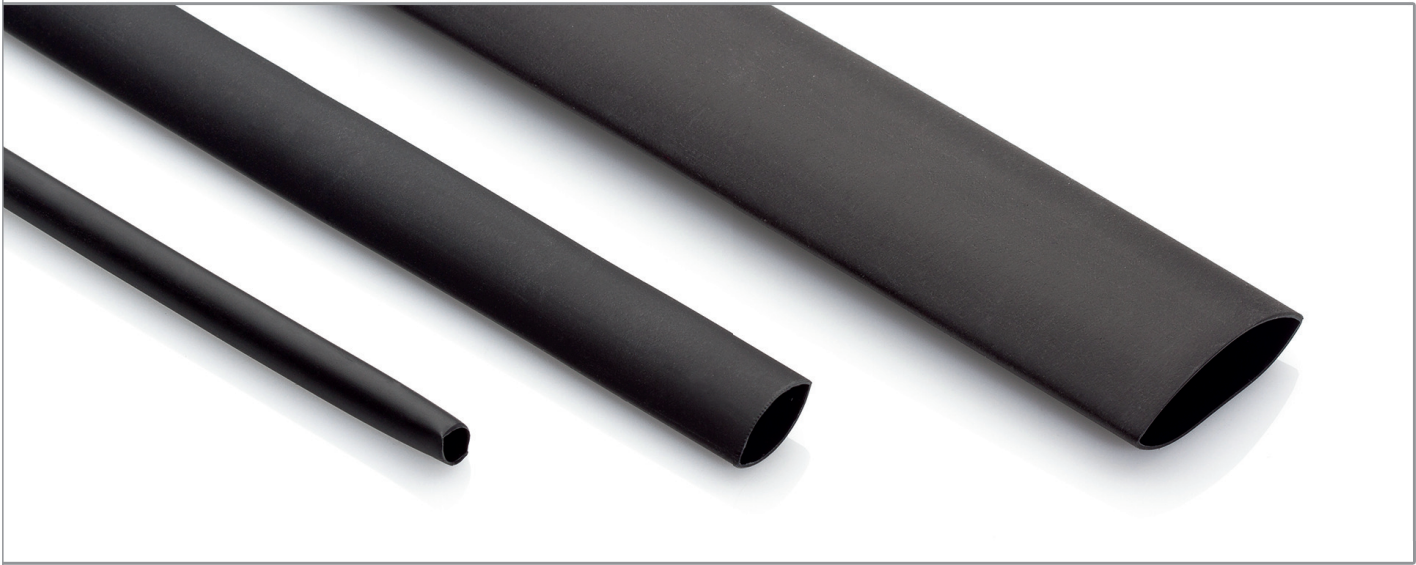

+ INFORMATION

- + High quality 3:1 ratio dual wall adhesive lined heat shrink tubing
- + Supplied in convenient 1.2metre lengths
- + Flame retardant, zero halogen
- + Weatherproof and UV stable

+ PROPERTIES

**Working Temperature Range**  
-55°C to +125°C

**Insulation Material**  
Cross-Linked Polyolefin (rated to 600V)

**Shrink Temperature**  
100°C

**Approvals**  
UL File number E4 79774  
Standard UL224 125°C

**Available Colours**  
Black only



+ DATA

| PROPERTY                          | DATA                 | PROPERTY                      | DATA         |
|-----------------------------------|----------------------|-------------------------------|--------------|
| RADIAL SHRINKING RATIO(%)         | ≥50                  | ULTIMATE ELONGATION RATIO (%) | ≥100         |
| TENSILE STRENGTH (MPA)            | ≥10.4                | LONGITUDINAL CHANGE (%)       | ≥10          |
| VOLUME RESISTIVITY (Ω CM)         | 10 <sup>13</sup>     | ULTIMATE ELONGATION RATIO (%) | ≥200         |
| FLAMMABILITY                      | VW 1                 | DIELECTRIC STRENGTH (KV/MM)   | ≥15          |
| FLUID RESISTANCE                  | Excellent            | WATER ABSORPTION (%)          | <0.4         |
| SOFTENING POINT                   | 120± 5               | COPPER CORROSION              | NO CORROSION |
| AGING IN CIRCULATING AIR OVEN     | 158.0±1.0°C (168hrs) | TISSUE STRENGTH               | >80          |
| AFTER AGING TENSILE STRENGTH(MPA) | ≥7.3                 |                               |              |

+ RELATED PRODUCTS



HG2 - Hot air gun

▶ PAGE 60