



www.partex.co.uk


## Product Technical Data Sheet - Heat Shrink Butt Connectors

Partex Heat Shrink Butt Connectors protect against the most challenging environments, with excellent moisture protection. When properly crimped and shrunk the adhesive lined heat shrink provides a seal resistant to water, and other contaminants, and provides excellent abrasion and strain resistance.

The translucent tubing allows visual inspection, ensuring that cables are inserted safely and correctly.

### **Specification:**

Material: Polyolefin  
Shrink Temperature: 100 °C

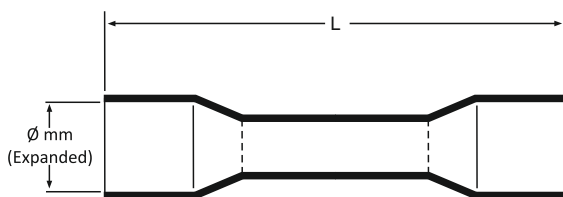

| Part Number | Wire Range |                 | Length<br>(L) mm | Colour |
|-------------|------------|-----------------|------------------|--------|
|             | AWG        | mm <sup>2</sup> |                  |        |
| HSB 1.25    | 22-18      | 0.5 - 1.5       | 37               | Red    |
| HSB 2.0     | 16-14      | 1.5 - 2.5       | 37               | Blue   |
| HSB 5.5     | 12-10      | 4 - 6           | 42               | Yellow |

Partex Marking Systems (UK) Ltd  
61-64 Station Road, Coleshill, Birmingham B46 1JT  
Tel: 01675 463670 Fax: 01675 463520 Email: sales@partex.co.uk