


Fork/Spade Terminals

Terminal Material: C1100 Copper

Insulation Material: Polyvinyl Chloride (PVC)

Plating: Electro-Tinned

Maximum Temperature: 167° F

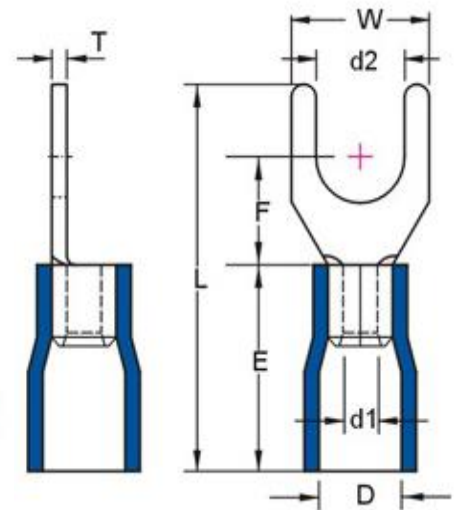

Color	Wire Size	Stud Size	PARTEX Part No.	Dimensions (in)								Current	Voltage
				T	L	W	d2	F	E	D	d1		
RED	22 - 16 AWG 0.5 - 1.5 mm ²	#4	RS32N	0.0295	0.8661	0.2244	0.1260	0.2795	0.4134	0.1693	0.0669	19 AMPS	600V
		#6	RS37			0.2441	0.1457						
		#6	RS37N			0.2244	0.1457						
		#8	RS43			0.2835	0.1693						
		#8	RS43N			0.2520	0.1693						
		#10	RS53			0.3150	0.2087						
		1/4"	RS64	0.9055	0.4213	0.2520	0.2992						
Color	Wire Size	Stud Size	PARTEX Part No.	Dimensions (in)								Current	Voltage
				T	L	W	d2	F	E	D	d1		
BLUE	16 - 14 AWG 1.5 - 2.5 mm ²	#4	BS32N	0.0315	0.8858	0.2244	0.1260	0.2795	0.4331	0.1850	0.0906	24 AMPS	600V
		#6	BS37			0.2441	0.1457						
		#6	BS37N			0.2244	0.1457						
		#8	BS43			0.2835	0.1693						
		#8	BS43N			0.2520	0.1693						
		#10	BS53			0.3150	0.2087						
		1/4"	BS64	0.9252	0.4213	0.2520	0.2992						
Color	Wire Size	Stud Size	PARTEX Part No.	Dimensions (in)								Current	Voltage
				T	L	W	d2	F	E	D	d1		
YELLOW	12 - 10 AWG 4.0 - 6.0 mm ²	#6	YS37	0.0394	1.0512	0.3189	0.1457	0.2992	0.5512	0.2638	0.1339	35 AMPS	600V
		#8	YS43			0.3228	0.1693						
		#10	YS53			0.3543	0.2087						
		1/4"	YS64			1.2087	0.4724						
		5/16"	YS84		1.2835	0.5315	0.3307	0.4724					



Approvals:
E163810
E318463

Partex Marking Systems, Inc. | 1155 N. Main Street | Lombard, IL 60148
P: 630-516-0400 | F: 630-833-7631 | E-mail: Sales@partexmarker.com



RoHS