


Female Push-On Fully Insulated

Terminal Material: C2680 Brass

Insulation Material: Polyvinyl Chloride (PVC)

Plating: Electro-Tinned

Maximum Temperature: 167° F

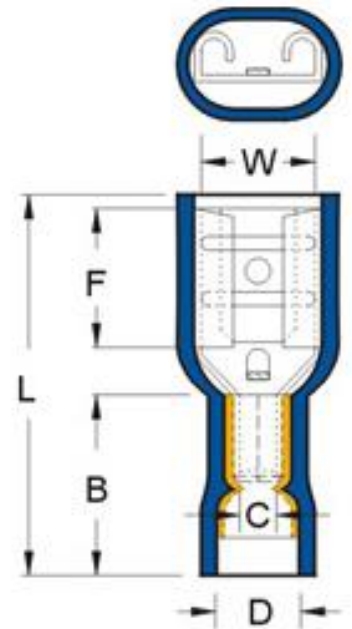

Color	Wire Size	PARTEX Part No.	Tab Receptacle (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
RED	22-16 AWG 0.5 - 1.5 mm ²	RF32/FI/VR	.110 x .032	0.031	0.846	0.126	0.276	0.413	0.161	0.067	7.5 AMPS	300V
		RF50/FI/VR	.189 x .032	0.031	0.827	0.197	0.256				10 AMPS	
		RF66/FI/VR	.252 x .032	0.031	0.866	0.264	0.276				19 AMPS	
Color	Wire Size	PARTEX Part No.	Tab Receptacle (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
BLUE	16-14 AWG 1.5 - 2.5 mm ²	BF50/FI/VR	.189 x .032	0.031	0.807	0.197	0.256	0.433	0.185	0.091	10 AMPS	300V
		BF66/FI/VR	.252 x .032		0.886	0.264	0.295				20 AMPS	
Color	Wire Size	PARTEX Part No.	Tab Receptacle (in)	Dimensions (in)							Current	Voltage
				Thickness	L	W	F	B	D	C		
YELLOW	12-10 AWG 4.0 - 6.0 mm ²	YF66/FI/VR	.252 x .032	0.031	1.004	0.264	0.295	0.551	0.256	0.134	20 AMPS	300V



Approvals:
E163810
E318463

Partex Marking Systems, Inc. | 1155 N. Main Street | Lombard, IL 60148
P: 630-516-0400 | F: 630-833-7631 | E-mail: Sales@partexmarker.com

