

CRIMPINGTOOL:CT50





Description.

Hand held manual operated tool with rotational die sets for ease of selection. For crimping copper tube terminals from 6mm to 50mm/sq.

FEATURES.

2 multiple die aperture rotating wheels built into the head for easy die selection.

Long handles to minimise crimping effort

Tubular steel handles to reduce weight.

Hexagonal die form.

Soft PVC moulded handles for optimum grip.

Material Specification.


Die and Head: Steel grade SCM440


Handles: Tubular steel

Handle treatment: Pyrocondensation cannula

Handle grips: Soft PVC Tool Weight: 1.3Kg

Model No.	A/F (mm)				
CT50	10mm ²	16mm ²	25mm²	35mm²	50mm²
	5mm	6mm	7mm	8.6mm	10mm



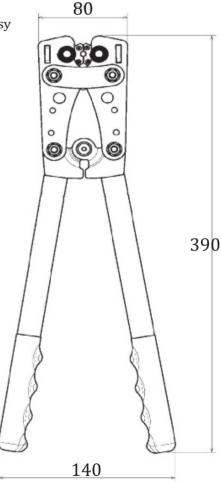

Application.

For crimping of copper tube terminals from 6mm to 50mm/sq. Meets the compression ratio requirements of BSEN60352-2:2006 and BSEN61238-1:2003.