

PYD/PAD/PAV

INSTALLATION TOOLS



- Simplify marking of thin and stripped wires.
- Excellent tools for combination marking.
- Shorten installation time.
- PAV – the U-shape enables faster installation when different wire diameters are mixed.
- Take up little space in the toolbox.
- PAD-3, -4 and -5 can also be used mounting the flat heatshrink tube from our PH-range.

SPECIFIKATION

PYD/PAD design


Teflon coated stainless steel alt. stainless steel conical installation tool with axial hole at the fat end for the wire. For use with stripped wires and PARTEX wire marking PA02 och PA1. PYD for thin wires.

PAV design

Stainless steel, U-shaped installation tool for both left- and right-mounting. Depending on how the U-shaped part of PAV is turned in, the marker can be expanded over the whole diameter range.

SPECIFIKATION

PYD/PAD

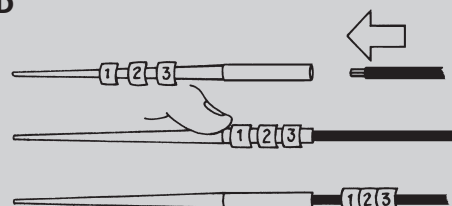

PAV

Depending on how the U-shaped part of PAV is turned in relation to the bellow of the marker sleeve, the marker sleeve can be expanded over the whole diameter range. This means faster installation when different wire diameters are mixed.



DIMENSIONS IN MM (NOMINAL)

Article number	Length (L)	Diameter (D1) mm	Diameter (D1) inch	Diameter (D2) mm	Diameter (D2) inch	Hole (Ø), Height (H)
PYD-1 M/PYD-1 T	100	2.0	.078	1.0	.039	1.5/-
PAD-3M/PAD-3T	100	3.1	.122	1.8	.070	2.5/-
PAD-4M/PAD-4T	100	4.2	.165	2.5	.098	3.5/-
PAD-5M/PAD-5T	100	5.0	.197	2.5	.098	4.5/-
PAV02M	124	3.8	.150	-	-	-/3.0
PAV10M	130	5.0	.197	-	-	-/4.0

T = teflon coated. M = metal/stainless steel.



SIZES AND PACKAGING, PYD/PAD/PAV

Article number	Designed for	Nuber/pack	Colour
PYD-1M	PY01	1 pce	Metallic
PAD-1T	PY01	1 pce	Green
PAD-3M	PA02	1 pce	Metallic
PAD-3T	PA02	1 pce	Red
PAD-4M	PA10	1 pce	Metallic
PAD-4T	PA10	1 pce	Dark blue
PAD-5M	PA10	1 pce	Metallic
PAD-5T	PA10	1 pce	Light blue
PAV02M	PA02	1 pce	Metallic
PAV10M	PA10	1 pce	Metallic