

+ INFORMATION


- + PA type sleeve with oval, transparent pocket for PFC and PP+ profile.
- + Specially designed pocket protects the label from damage and keeps it in place.
- + PFC or PP+ may be inserted both before or after application of the marker.
- + Four sizes with the same pocket size cover most cable diameters.
- + Help to reduce inventory and reduce cost of marking.
- + Also available in Halogen free material (PTZ+).

+ PROPERTIES


Temperature range
PT+: -30°C to +60°C
PTZ+: -30°C to +90°C

Material
PT+: PVC
PTZ+: ZEREX

+ RELATED PRODUCTS

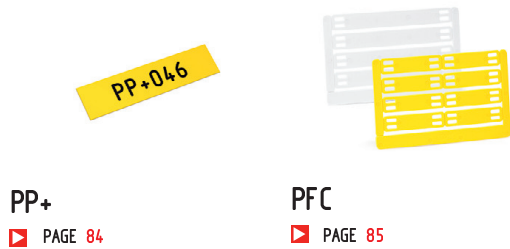


+ APPLICATION

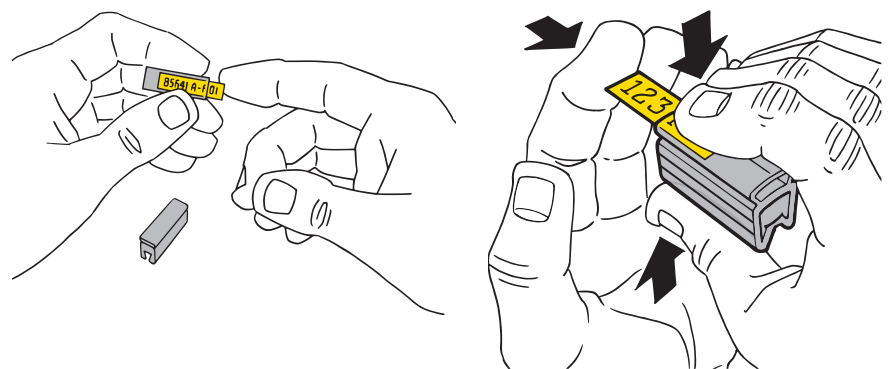

PT+20030K

+ DIMENSIONS



TYPE	LENGTH (mm)	WIDTH (B mm)	HEIGHT (H mm)
PT+02	12/15/18/21/30	5.0	5.0
PT+10	12/15/18/21/30	5.0	7.0
PT+20	12/15/18/21/30	6.0	10.0
PT+30	12/15/18/21/30	10.0	19.0

+ SIZES AND PACKAGING

TYPE	DIAMETER / AREA*	LENGTH	SUITABLE TAG	PACKAGING
PT+02/PTZ+02	~1.3 - 3.0 mm 0.5 to 0.75 mm ²	12 mm 15 mm 18 mm 21 mm 30 mm	PFC042 / PP+046	 pack of 200 pcs.
PT+10/PTZ+10	~2.5 - 5.0 mm 0.75 to 4.0 mm ²	12 mm 15 mm 18 mm 21 mm 30 mm	PFC042 / PP+046	 pack of 200 pcs.
PT+20/PTZ+20	~4.0 - 10.0 mm 2.5 to 10.0 mm ²	12 mm 15 mm 18 mm 21 mm 30 mm	PFC042 / PP+046	 pack of 100 pcs.
PT+30/PTZ+30	~8.0 - 16.0 mm 16.0 to 50.0 mm ²	12 mm 15 mm 18 mm 21 mm 30 mm	PFC042 / PP+046	 pack of 50 pcs.

* Size shown refers to BS6231 tri-rated cable.