

INFORMATION

- + Universal marking system for control panels and components.
- + Rapid installation using pre-marked or write-on files fixed to unique rail system.
- + Rail mounted in seconds using self-adhesive backing and/or rivets and screws.
- + Large, clear legends for instant identification even at distance.



PROPERTIES

Temperature range
-20°C to +60°C


Material
Cadmium and silicon free rigid PVC



RELATED PRODUCTS


 PP+090


PP+090

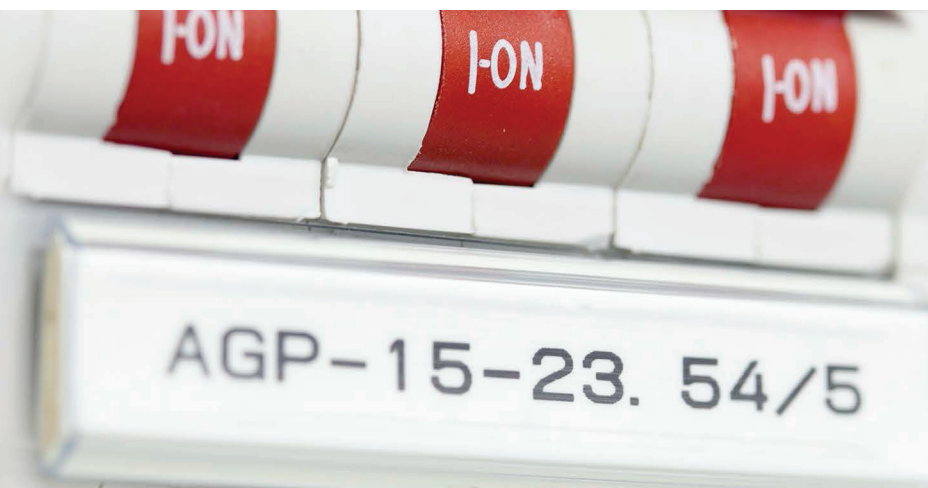
 PAGE 84




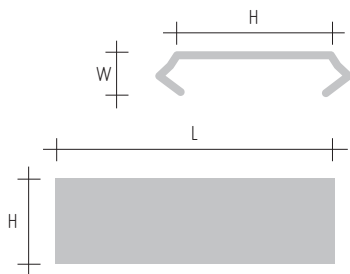
+ DIMENSIONS AND PACKAGING


White markers with black print

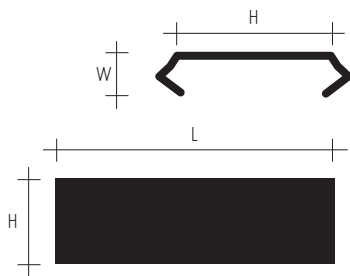


TYPE	MODULE WIDTH	THICKNESS [mm]	HEIGHT [mm]	LENGTH [mm]	PACKAGING
PS-20006	1/3	4.2	12.9	5.5	 20 pcs.
PS-20009	0.5	4.2	12.9	8.75	
PS-20018	1	4.2	12.9	17.5	
PS-20027	1.5	4.2	12.9	26.25	
PS-20035	2	4.2	12.9	35.0	
PS-20053	3	4.2	12.9	52.5	1 m
PS-20KN9	-	4.2	12.9	1 m	

Transparent modules



TYPE	MODULE WIDTH	LENGTH [mm]	MARKER TAG	PACKAGING
PS-20009	0.5	8.75	PP+	 20 pcs.
PS-20018	1	17.5	PF, PFC, PP+	
PS-20027	1.5	26.25	PF, PFC, PP+	
PS-20035	2	35.0	PF, PFC, PP+	
PS-20053	3	52.5	PF, PFC, PP+	
PS-20KT	-	1 m	PF, PFC, PP+	1 m

Base profile with adhesive

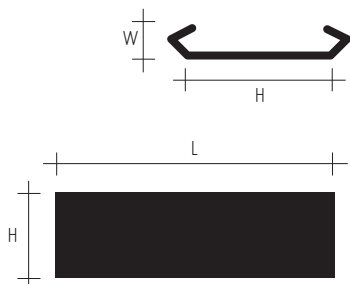

TYPE	LENGTH [m]	HEIGHT [mm]	THICKNESS [mm]	COLOUR	PACKAGING
PS-20BPS	1	11.6	3.0	black	10 m
PS-20BPV	1	11.6	3.0	white	10 m