



**+ INFORMATION**

- + Oval profile to identify cables and wires.
- + Quick installation - all information included on one sleeve.
- + Designed for the most popular sizes of wires and cables.
- + Easy to print onto with thermal transfer printers from Partex.
- + PO-068 can be applied directly onto the POH or PKH carriers and then fastened to the cable with cable ties.

**+ PROPERTIES**

**Temperature range**  
PO: -30°C to +60°C; POZ: -30°C to +90°C

**Material**  
PO - PVC, POZ - ZEREX

**Print**  
thermal transfer

**Standard colours**  
yellow and white, others available on request

**+ RELATED PRODUCTS**



**PROMARK-T1000**  
▶ PAGE 102



**MK10**  
▶ PAGE 108



**MK10-DH**  
▶ PAGE 110




**PKH**  
▶ PAGE 23







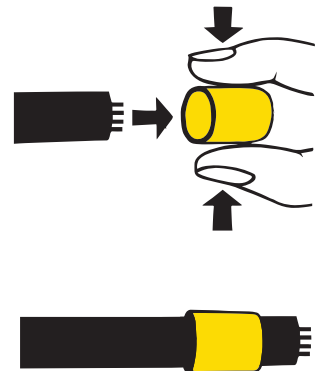


**POH**  
▶ PAGE 23

**+ APPLICATION**



# PO-06000BN4


## + DIMENSIONS AND PACKAGING

TYPE	TYPE - (ZERO HALOGEN)	DIAMETER [mm] [min/max]	AREA* [mm <sup>2</sup> ]	PACKAGING	COMPATIBLE PRINTERS
PO-01	POZ-01	1.3 / 1.8		 6 m / 250 m	PROMARK-T1000
PO-02	POZ-02	1.7 / 2.2		 5 m / 60 m / 250 m	
PO-03	POZ-03	2.0 / 2.5		4.5 m / 50 m / 250 m	
PO-04	POZ-04	2.2 / 2.8	0.5	4.5 m / 50 m / 200 m	
PO-05	POZ-05	2.7 / 3.5	0.75-1.0	 4 m / 40 m / 200 m	
PO-06	POZ-06	3.2 / 4.0	1.5-2.5	3.5 m / 40 m / 200 m	
PO-068*	PKZ20	6.8 / 7.0	-	 4.5 m / 50 m	
PO-06Q**	-	-	-	 3.5 m / 40 m	
PO-068Q**	PKZ20Q	-	-	25 m / 50 m	
PO-07	POZ-07	3.8 / 4.7	4.0	 3.5 m / 30 m / 100 m	
PO-08	POZ-08	4.6 / 5.5	6.0	3 m / 30 m / 100 m	
PO-09	POZ-09	5.6 / 7.0	10.0	 50 m	
PO-10	POZ-10	6.5 / 8.0	16.0		

KK10, KK10-DH

\* mounted on POH, PKH or directly with cable tie    \*\* pre-punched, mounted with cable tie

# Size shown refers to BS6231 tri-rated cable.

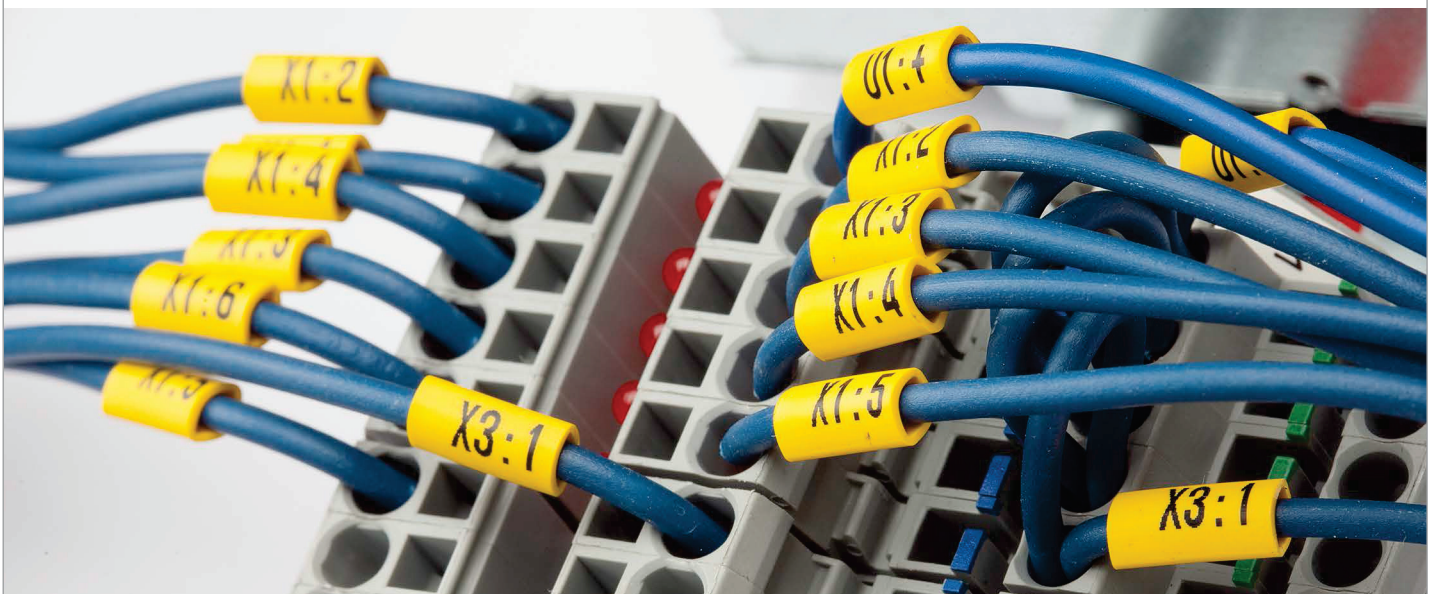

## + PO - WIRE AND CABLE MARKERS

TYPE	DIAMETER [min/max] [mm]	AREA** [mm <sup>2</sup> ]
PO/POZ-01	1.3/1.8	
PO/POZ-02	1.7/2.2	
PO/POZ-03	2.0/2.5	
PO/POZ-04	2.2/2.8	0.5
PO/POZ-05	2.7/3.5	0.75-1.0
PO/POZ-06	3.2/4.0	1.5-2.5
PO/POZ-068*	6.8/7.0	-
PO/POZ-07	3.8/4.7	4.0
PO/POZ-08	4.6/5.5	6.0
PO/POZ-09	5.6/7.0	10.0
PO/POZ-10	6.5/8.0	16.0
PO/POZ-12	7.5/10.0	20.0
PO/POZ-14	9.5/12.0	25.0
PO/POZ-16	11.5/14.0	35.0
PO/POZ-18	13.5/16.0	50.0
PO/POZ-20	15.5/18.0	70.0
PO/POZ-22	17.5/20.0	95.0
PO/POZ-24	19.5/22.0	120.0
PO/POZ-26	21.5/24.0	150.0
PO/POZ-28	24.0/28.0	185.0

\* Mountable on POH and PKH carriers

\*\* Size shown refers to BS6231 tri-rated cable.

## + PHZ - HEAT SHRINK

TYPE	DIAMETER BEFORE SHRINKING [mm]	DIAMETER AFTER SHRINKING [mm]
PHZ/PHZF20024	2.4	1.2
PHZ/PHZF20032	3.2	1.6
PHZ/PHZF20048	4.8	2.4
PHZ/PHZF20064	6.4	3.2
PHZ/PHZF20095	9.5	4.8
PHZ/PHZF20127	12.7	6.4
PHZ/PHZF20190	19.0	9.5
PHZ/PHZF20254	25.4	12.7
PHZ/PHZF20320	32.0	16.0

## + PACKAGING



## UN SORTED

Your customised markers can be sorted and packaged however you require.



## ON A REEL / IN A BAG