


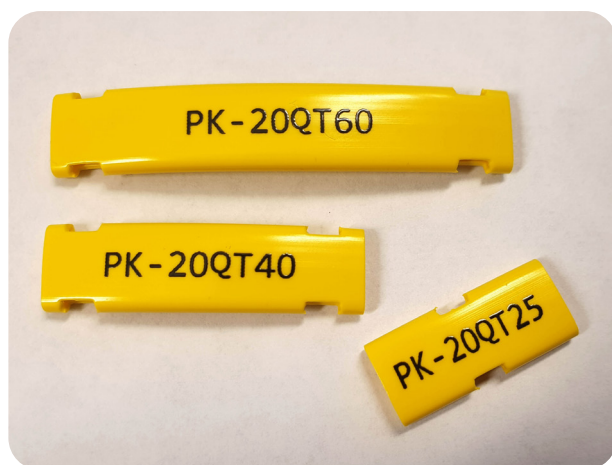

PK20Q/PKZ20Q

- Cable marker with pre punched holes, easy mounted with cable ties
- Marking with all information on one single sleeve.
- Print on site with thermal transfer printer or pre-printed as a customized marker.
- Also available as halogen-free

General information

Material

PK: Cadmium and silicon free PVC

PKZ: Thermoplastic polyether based polyurethane mixture. The material is free from halogen, cadmium and silicon.

Colour

Standard colors: Yellow and white.
Other colours, please contact Partex.

Printing

Print-on-site: Thermal transfer
Customized: Etching ink

Technical information

Temperature range

PK: -30°C to +60°C (-22°F to +140°F)

PKZ: -30°C to +90°C (-22°F to +194°F)

Storage

+10°C to +27°C (+50°F to +80°F)

Product performance

- PK: Flammability resistance according to UL94-V0 @ 3.0
PKZ: Flammability resistance according to UL94-V0 @ 0.4
- Resistant to UV radiation, corresponding to 1 year outdoors in the south of Sweden).
- Resistance to temperature and ageing meets norms of Partex Product Test Programme.
- PKZ: Approved to **NF F 00-608**
 - 5.5.1 Terminal aging
 - 5.5.4 Resistance to liquid fuel
 - 5.5.11 Oxygen Index
 - 6.1 Adhesion marker sleeves

Approved according to
CEN/TS 45545-2 HL2.

