


# CMT Cable Markers

## Extreme Temperature

The CMT cable marker is specifically designed for the marking of cables and pipework. They are made from highly flame retardant material. They have excellent chemical and mechanical properties with a low friction surface.

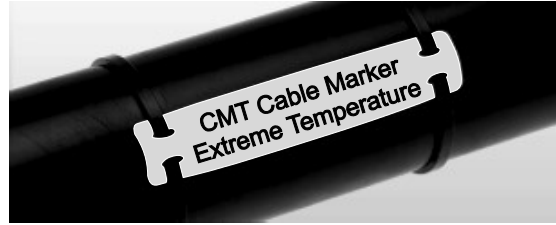

### INFORMATION

- + UV stable print quality
- + Print Quality to Mil. Spec Standards
- + RoHS and REACH Compliant
- + Flame retardant
- + Self Extinguishing

### SPECIFICATIONS

**Material**

Polyvinylidene fluoride

**Temperature range**

Operating Temperature -55°C to +225°C

**Standard colours**

white

**Print**

thermal transfer

**Print performance**

Adherence: SAE-AS5942

Fluid resistance: MIL202 Method 215K

**Resistance:**

Flame retardant to: UL224 VW-1

**Certified and Issued to:**

SAE-AMS-DTL-23053/18

PROPERTY	VALUE
Continuous Operating Temperature	-55°C to +225°C
Heat Ageing (225°C x 168hrs)	No cracking (pass)
Heat Shock (275°C x 4hrs)	Pass no crack, flowing or dripping
Longitudinal Change	+0%, -10% Max
Tensile Strength	24.0 MPa Min
Elongation at Break	200% Min
Water Absorption	0.10% Max
Flammability	UL 224 VW1
Dielectric Strength	20KV/mm Min

### PRODUCT RANGE

TYPE	MARKER SIZE	TEXT AREA	PACK QUANTITY
CMT060010LR9	60x10mm	40x10mm	1450
CMT075015LR9	75x15mm	55x15mm	1100
CMT090025LR9	90x25mm	70x25mm	750

Recommended Ribbon: HT series