



CMM

CABLE MARKER MILITARY GRADE

- Meets SAE-AMS-DTL 23053/6 class 1 Specification
- Flame Retardant to NF F00-608 & NF C32-070
- Rounded edges to eliminate snagging
- Backwards compatible for most printers
- Print performance to Military Specifications
- Ladder format
- Colours - White and Yellow

GENERAL INFORMATION

Designed to survive environments such as aerospace and military harnesses for identifying cable and wire bundles. Excellent chemical and mechanical properties with low friction surface.

CMM meets printing and fluid resistance standards of NF F 00-608 type H, SAE-AS5942, as well as MIL-STD-202 Method 215K and SAE-AMS-DTL-23053-6 class 1 standards. The cable labels are applied to cables and harness assemblies with cable ties, and are also suitable for retrofit purposes.

Markers are supplied in ladder form on a roll, having been conditioned for thermal transfer printing with our range of printers and qualified ribbons.

TECHNICAL INFORMATION

Approvals and Standards

Certified and issued to:

- SAE-AMS-DTL-23053/6
- SAE-AS5942
- NF F00-608 & NF C32-070
- MIL-STD-202 Method 215K

Property	Value
Continuous Operating Temperature	-55°C to +135°C
Low Temp Flexibility -55°C	No cracking (pass)
Heat Shock (275°C x 4hrs)	Pass no crack, flowing or dripping
Oxygen Index	24% min
Tensile Strength	13.8 MPa Min.
Elongation at Break	200% Min.
Diesel Fuel Resistance	NF F00-608 - 7MPa Min.
Secant Modulus	172 MPa Max
Flammability	Flame retarded 60 sec Max. ASTM-D2671 (B)
Water Absorption	2% Max.

APPLICATION

Additional Information

Recommended Printer & Ribbon: -
 Printer 300dpi MK10
 Ribbon MK10-RB-BK2020-80
 Print Performance: -
 Adherence: SAE-AS5942
 Fluid Resistance: MIL202 Method 215J
 Store in original packaging
 Recommended temp. at +10°C to 25°C 45-55% R.H.
 Use within 3 years from date of manufacture


PRODUCT AND ORDER INFORMATION

Marker Size (mm)	Text Area mm	Markers /Box	Cable Tie Holes	Order Code
60x10mm	40x10mm	1,450	4	CMM060010LR*
75x15mm	55x15mm	1,100	4	CMM075015LR*
90x25mm	70x25mm	750	4	CMM090025LR*

* = colour (4= Yellow, 9=White)

Ordering Information Example

CMM 060 010 LR *

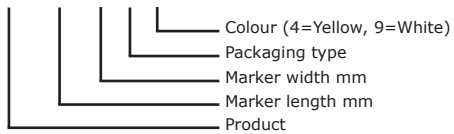

PARTEX MARKING SYSTEMS AB

SE-547 22 GULLSPÅNG, SWEDEN
 PHONE +46 (0)551 280 00 • FAX +46 (0)551 280 99
 SALES@PARTEX.SE • WWW.PARTEX.NU