



+ INFORMATION

- + Flat cable marker with pre-punched holes
- + Easy to mount on the cable with cable ties
- + Very durable and fast print with printer MK10 or MK10-DH, up to 2000 markers per hour .
- + Also available pre-printed according to customer specifications.
- + Flexible material which neatly forms to the cable
- + Adjustable font size gives the ability to have up to 5 lines of text

+ SPECIFICATIONS

- + PPQ + is a flat profile with pre-punched holes. The profile is supplied on reels and have fixed lengths. PPQ+ can be printed on the MK-10 or EOS1 printers, or can be ordered pre-printed according to customer specifications.
- + Profile to be printed on the MK10 or EOS1 printers is supplied on 20 meter reels containing between 300 and 500 markers.

+ PROPERTIES

Temperature range

Temperature range: -20°C to +60°C (-4°F to +140°F)
Storage temperature: +10°C to +27°C (+32°F to 81°F) < 95% Rh

Material

Soft PVC

Print

thermal transfer

Resistance

self-extinguishing to UL94-V0
excellent service life and resistance to UV radiation and chemicals.

Standard colours


yellow and white

+ RELATED PRODUCTS



MK10

▶ PAGE 108



EOS1

▶ PAGE 106



HFC

▶ PAGE 97




RIBBONS

▶ PAGE 81



+ DIMENSIONS AND PACKAGING

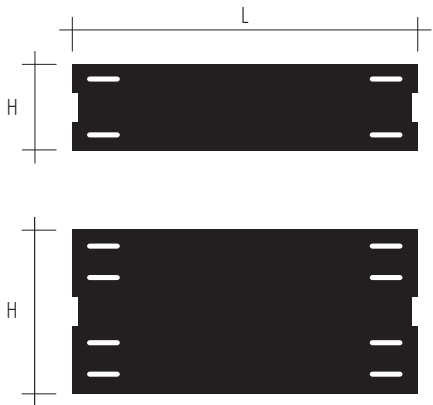

TYPE	HEIGHT [H mm]	LENGTH [L mm]	PACKAGING
PPQ+10040DN*	10 mm	40 mm	20 m
PPQ+10060DN*	10 mm	60 mm	20 m
PPQ+10080DN*	10 mm	80 mm	20 m
PPQ+19040DN*	19 mm	40 mm	20 m
PPQ+19060DN*	19 mm	60 mm	20 m
PPQ+19080DN*	19 mm	80 mm	20 m
PPQ+38060DN*	38 mm	60 mm	20 m
PPQ+38080DN*	38 mm	80 mm	20 m
PPQ+38100DN*	38 mm	100 mm	20 m

* - product is available in two colors: yellow (4) white (9)

