



# PPQZ

## CABLE MARKER

- Flat cable marker with pre punched holes
- Halogen free material
- Easy mounted on the cable with cable ties
- Printed in Partex marking machine MK10.

### GENERAL INFORMATION

#### Design

PPQZ is a flat profile with pre punched holes. The profile is delivered semi cut on reels for printing in Partex MK10 system or as a ready printed marker.

For printing in Partex MK10 the profile is delivered on DN-reels with 300 markers per reel (20m).

PPQZ is easily mounted on a cable with cable ties.

#### Print

Thermal transfer print with Partex MK10.

### TECHNICAL SPECIFICATION

#### Material

Zerex, polyether-type thermoplastic polyurethane compound.

#### Colour

White and yellow

#### Temperature range

-30°C till +90°C (-22°F to +194°F).

#### Product performance

Flame retardant according UL94-V0@0.4

## PRODUCT AND ORDER INFORMATION

Profile			
Article number	Information	Marker length	Qty/roll
PPQZ10040DN*	Flat profile, W: 10mm L: 40mm	40mm	20m
PPQZ10060DN*	Flat profile, W: 10mm L: 60mm	60mm	20m
PPQZ10080DN*	Flat profile, W: 10mm L: 80mm	80mm	20m


\* = the product is available in yellow and white. 4 for yellow, and 9 for white.

## TECHNICAL DATA

Properties	Unit	Value	Test method
Density	g/cm <sup>3</sup>	1.19	ASTM D-792
Thickness	mm	1,00	
Hardness	Shore A	90	ASTM D-2240
Tensile strength	MPa	13.8	ASTM D-412
Elongation at break	100%	6.9	ASTM D-412

The data above is approximate values and should only be considered as indicative.  
 \* = value of density is dependent on the color of the foil.

## APPLICATION

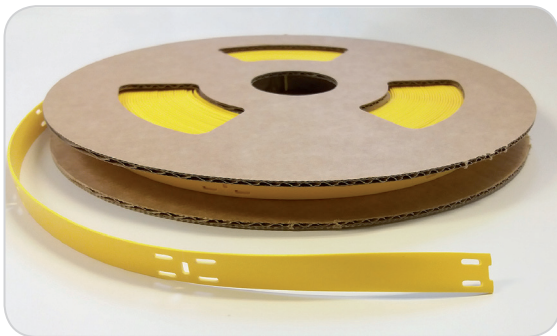

PPQZ is available in 10mm width for printing in Partex MK10



PPQZ in mounted with cable ties.