



# MK10

Thermal transfer printers



**We mark the future**



# Reliability, readability, consistency. A new era of industrial printing.

Do you happen to be a professional? If so, minimising the risk of error is certainly your priority. As is the durability of the description – to ensure that it remains readable not only in a few months but even several years from now. What else? Time, without a doubt. Wasting it on the tedious, manual application of markings is simply not worth it.

Fortunately, there are modern tools that can greatly facilitate your work in this regard. Introducing our improved MK10 series thermal-transfer printers and Promark Creator – the most user-friendly, proprietary marking design software.

MK10-EOS2 is a highly efficient model for semi-industrial applications that has already revolutionised the market.

MK10-EOS5 is an indispensable solution for industrial applications that require a large number of markers to be printed. Additionally, both models can be equipped with Wi-Fi modules to make them even more functional and easier to use. EOS5 also comes in a portable, battery-powered version that requires no power connection to work.

On the other hand, MK10-DH allows you to perform durable thermal-transfer prints on both sides of the marker at once.

Throughout seven decades of operation, we have produced billions of markers – enough to circle the earth a dozen times over. We continue to raise the bar labelled “impossible” ever upwards. Recently, we have managed to surpass ourselves by creating open profile PCT markers for thermal-transfer printing – the only such solution in the world.

We are sure that this catalogue will remove any doubts you may have about using modern marking methods. Nonetheless, should you require any help in choosing the right identification solution for you, please do not hesitate to ask.

We always enjoy discussing our work. After all, we have been in this business for over seventy years.

## Content

MK10-EOS2	4
MK10-EOS5	6
MK10-SQUIX	8
MK10-DH	10
Accessories / Index	12
Ribbons selection	14
Ribbons	16
Markers	18
ProSleeve	22
Labels	28
Promark Creator	36

# MK10-EOS2



## Information

- Professional, efficient printer for the production of medium quantities of markers for cables, wires and electrical components.
- Feeds, prints and perforates\* Partex profiles and labels.
- MK10-EOS2 is a device for semi-industrial applications, ideal for marking electrical installations and control cabinet components.
- A new, colourful touch screen.
- The printer is connected to the computer via a USB 2.0 port and controlled by Promark Creator software.
- Wi-Fi module (optional).
- The max diameter of reel/ disc placed inside the device is up to 152 mm.

\*Upon installing an optional perforator. The maximum width of the perforated profile is 45 mm.

### Kit contents

MK10-EOS2 - label and marker printer, power cord, USB cable, Promark Creator software (annual subscription).

## Properties

### Temperature range:

Operating temperature range / humidity:  
+5°C - 40°C / 10 - 85%

Storage temperature / humidity:  
0°C - 60°C / 20 - 85%

To obtain the best printing result, the temperature of the profile shouldn't be lower than +20°C

### Thermal-transfer printing:

Printable resolution 300 dpi

### Print speed:

150 mm/s

### Print width:

105.7 mm

### Maximum material width:

116 mm

### Interfaces:

USB 2.0 Hi-speed device to connect a PC, Ethernet 10/100 Mbit/s, 1 x USB host on the operation panel for Service Key or USB memory stick, 2 x USB host on the back of the device for Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick, external operation panel.

### PC connection:

Controlled by Promark Creator software

### Operating system:

Windows: XP, Vista, WIN 7, WIN8, WIN10

### Main memory:

256 MB RAM

### Power supply:


110~240 V AC, (50~60 Hz)  
Certified CE

### Dimensions:

(W x D x H): 253 x 191 x 322 mm

### Weight:

4 kg

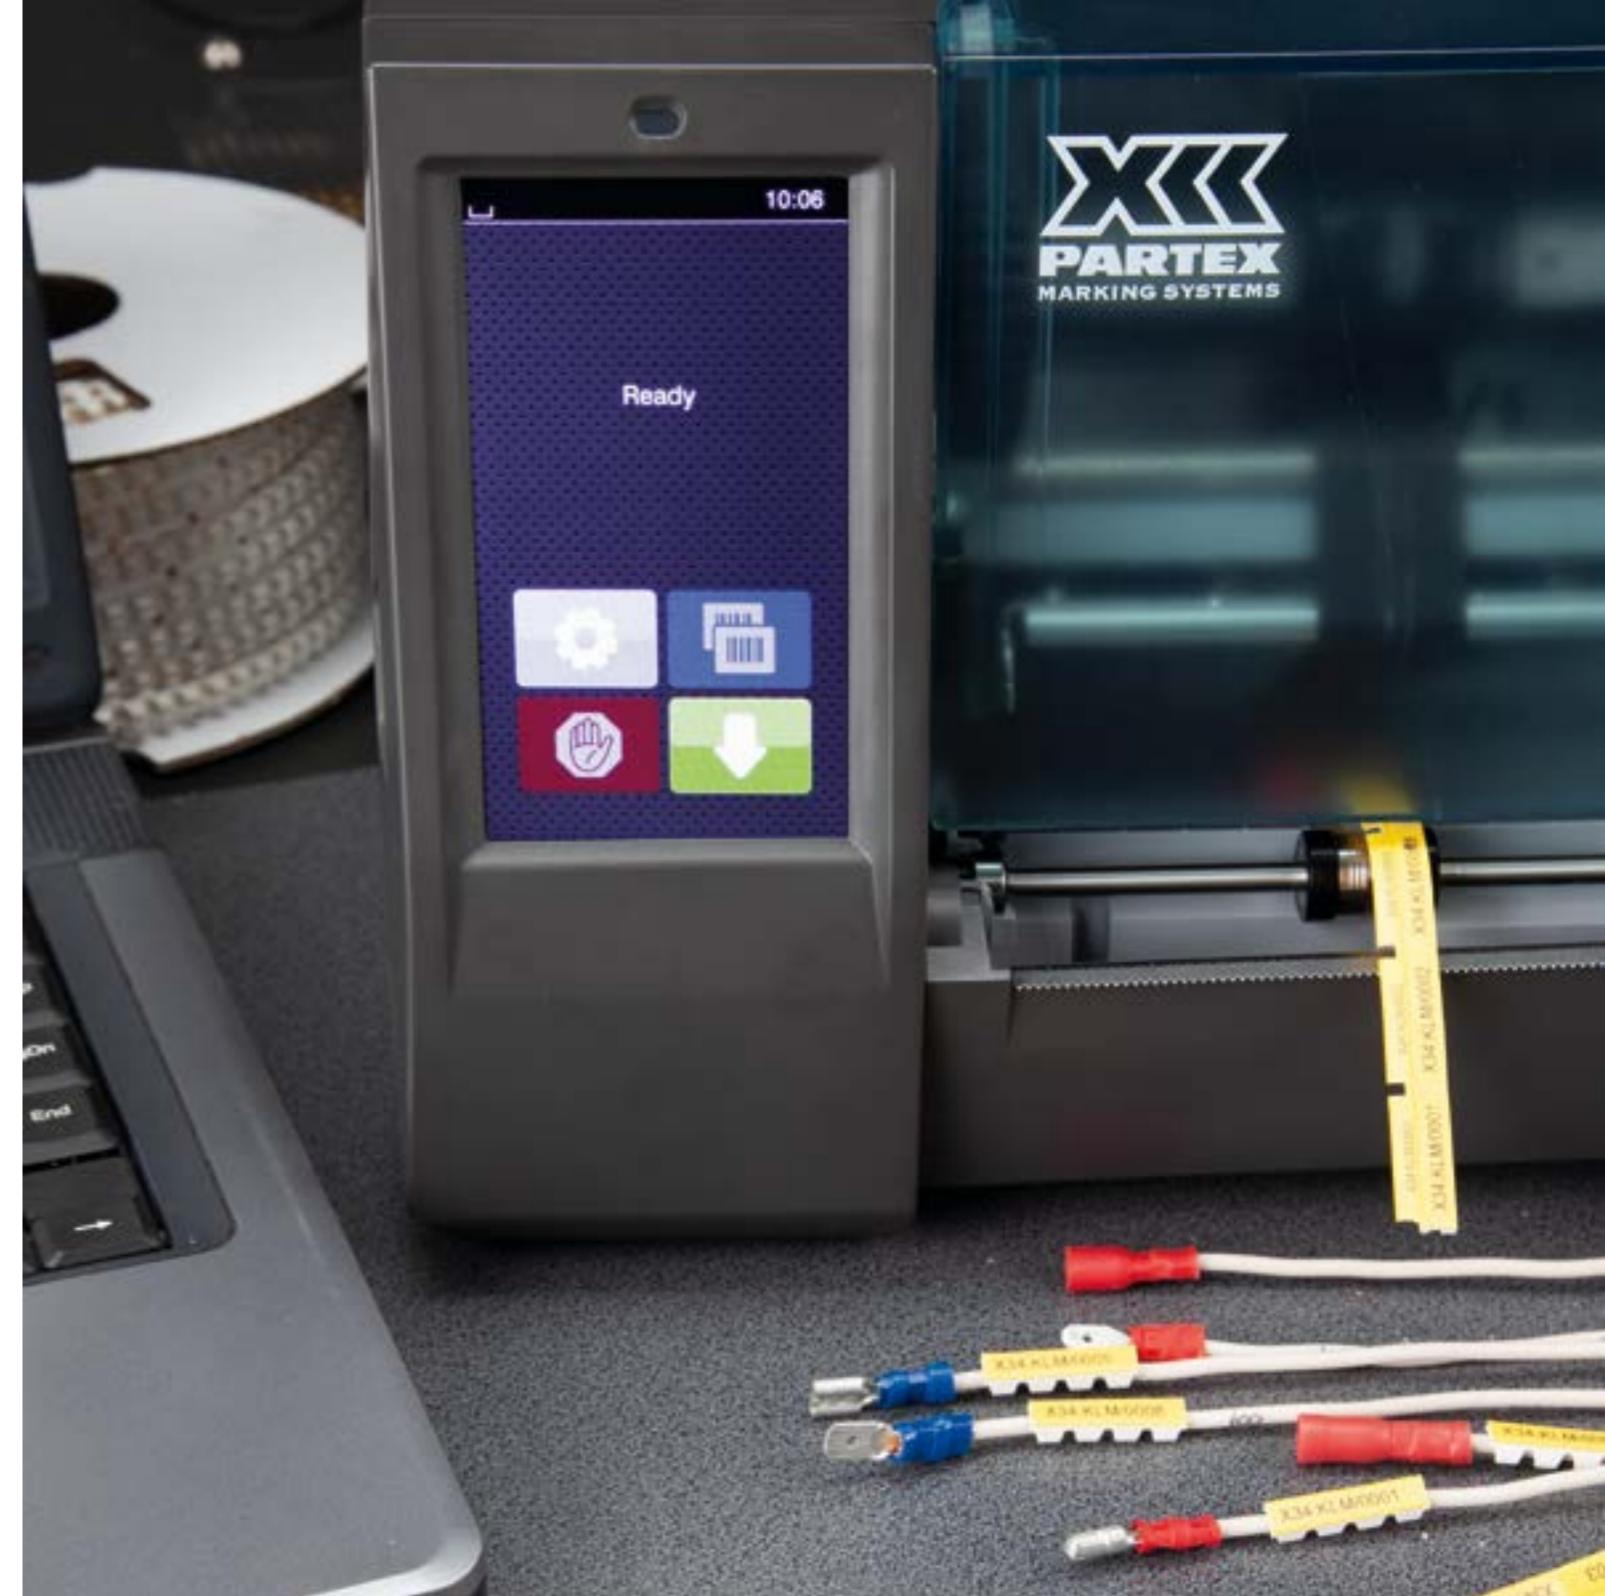

# MK10-EOS5



## Information

- Professional, efficient printer for the production of medium quantities of markers for cables, wires and electrical components.
- Feeds, prints and perforates\* Partex profiles and labels.
- MK10-EOS5 is a device for industrial applications, ideal for marking electrical installations and control cabinet components.
- A new, colourful touch screen.
- The printer is connected to the computer via a USB 2.0 port and controlled by Promark Creator software.
- Available also as mobile version, EOS5-MOBILE which can be equipped with a battery.
- Wi-Fi module (optional).
- The max diameter of reel/ disc placed inside the device is up to 203 mm.

\*Upon installing an optional perforator. The maximum width of the perforated profile is 45 mm.

### Kit contents

**MK10-EOS5** - label and marker printer, power cord, USB cable, Promark Creator software (annual subscription).

**MK10-EOS5-MOBILE** - mobile label and marker printer, power cord, USB cable, Promark Creator software (annual subscription).

## Properties

### Temperature range:

Operating temperature range / humidity:  
+5°C - 40°C / 10 - 85%

Storage temperature / humidity:  
0°C - 60°C / 20 - 85%

To obtain the best printing result, the temperature of the profile shouldn't be lower than +20°C

### Thermal-transfer printing:

Printable resolution 300 dpi

### Print speed:

150 mm/s

### Print width:

105.7 mm

### Maximum material width:

116 mm

### Interfaces:

USB 2.0 Hi-speed device to connect a PC, Ethernet 10/100 Mbit/s, 1 x USB host on the operation panel for Service Key or USB memory stick, 2 x USB host on the back of the device for Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick, external operation panel.

### PC connection:

Controlled by Promark Creator software

### Operating system:

Windows: Vista, WIN7, WIN8, WIN10, WIN11

### Main memory:

256 MB RAM

### Power supply:

110~240 V AC, (50~60 Hz)  
Certified CE

### Dimensions:

(W x H x D): 264 x 247 x 412 mm

### Weight:

5 kg



# MK10-SQUIX



## Information

- Compact heavy duty printer for high demand production for wire, cable and component marking.
- Feeds, prints, cuts and perforates\* bulk Partex profiles.
- MK10-SQUIX is a very cost effective identification system for use in panel building and electrical installations.
- USB connection, controlled by Promark Creator software.
- Quick and simple handling thanks to the touch screen.
- The built-in Wi-Fi module allows for wireless data transmission.
- MK10-SQUIX is a modern thermal transfer printer with a high production speed (up to 300mm/sec).
- MK10-SQUIX can be connected to your computer with a USB cable or Wi-Fi module and controlled by Partex Promark Creator software.
- The max diameter of reel/ disk placed inside the device is up to 205 mm.
- Numerous features, the touch screen, and broad printer head with 300 dpi resolution make this an excellent device for industrial applications.

\*Upon installing an optional perforator. The maximum width of the perforated profile is 85 mm.

### Kit contents

**MK10-SQUIX** - label and marker printer, power cord, USB cable, Promark Creator software (annual subscription).

**MK10-SQUIX-SET** - label and marker printer, perforation cutter, power cord, USB cable, ink ribbon, Wi-Fi module, Promark Creator software (annual subscription).

## Properties

### Temperature range:

Operating temperature range / humidity:  
+5°C - 40°C / 10 - 85%

Storage temperature / humidity:  
0°C - 60°C / 20 - 85%

To obtain the best printing result, the temperature of the profile shouldn't be lower than +20°C

### Thermal-transfer printing:

Printable resolution 300 dpi

### Print speed:

300 mm/s

### Print width:

105.7 mm

### Maximum material width:

116 mm

### Interfaces:

USB 2.0, Ethernet 10/100 Mbit/s, module Wi-Fi

### PC connection:

Controlled by Promark Creator software

### Operating system:

Windows: Vista, WIN7, WIN8, WIN10, WIN11

### Memory:

Main memory (RAM) 256 MB

Data memory (IFFS) 50 MB

### Power supply:

100-240 V AC, (50~60 Hz), FCC Class A, CB, CCC, cULus, CoC, EAC

Certified CE

### Dimensions:

(W x H x D): 252 x 288 x 460 mm

### Weight:

10 kg



# MK10-DH



## Information

- Performs durable thermal transfer printing on both sides of the marker simultaneously.
- Perforates\* the profile to a set length or adjusts it to the number of characters.
- Controlled via USB port and dedicated Promark Creator software.
- The information on the second side can be different or the same as on the first side of the marker.
- When the marker is rotated, the text always remains in the same orientation.
- Maximum diameter of the profile roll/disc for printing, placed inside the device: 300 mm.

\* Upon installing an optional perforator. The maximum width of the perforated profile is 85 mm.

### Kit contents

**MK10-DH** - dual-head marker printer, power cable, USB cable, Promark Creator software (annual subscription).

**MK10-DH-SET** - dual-head marker printer, perforation cutter, power cable, USB cable, 2 x ink ribbon, Wi-Fi module, Promark Creator software (annual subscription).

## Properties

### Temperature range:

Operating temperature/humidity:  
+5°C - 40°C / 10 - 85%  
Storage temperature/humidity:  
0°C - 60°C / 20 - 85%  
Recommended profile temperature:  
should not be lower than 20°C

### Thermal transfer printing:

Resolution: 300 dpi

### Maximum print speed:

150 mm/s (100 mm/s for Partex profiles)

### Maximum print width:

105.7 mm

### Maximum material width:

110 mm

### Interfaces:

USB 2.0, Ethernet 10/100 Mbit/s, RS232-C,  
2 x USB hosts on the control panel,  
2 x USB hosts on the back of a unit

### Connection to computer:

Controlled by Promark Creator software

### Operating system:

Windows: Vista, WIN7, WIN8, WIN10, WIN11

### Power supply:

100~240 V AC, (50~60 Hz), FCC class A, ICES-3, cULus,  
CB, CE certified

### Dimensions:

(W x H x D): 248 x 395 x 594 mm

### Weight:

21 kg



# Accessories / Index



**MK-RS3**  
Stand for small reels



**MK-STV**  
Floor reel stand  
(W x D x H): 568 x 560 x 960 mm



**MK10-EOS-HC**  
Aluminum case for  
MK10-EOS5 and MK10-EOS2



**MK10-EOS5-CU**  
Perforator for MK10-EOS5 printer



**MK10-EOS5-ACCU**  
Rechargeable battery for  
MK10-EOS5-MOBILE



**MK10-EOS-PCT**  
Roller for PCT marker

Type	Description	MK10-EOS2	MK10-EOS5	MK10-SQUIX	MK10-DH
MK10-EOS2	Label and marker printer EOS2	✓			
MK10-EOS5	Label and marker printer EOS5		✓		
MK10-EOS5-MOBILE	Label and marker printer EOS5 mobile version (battery not included)		✓		
MK10-EOS5-ACCU	Rechargeable battery for EOS4/EOS5-MOBILE		✓		
MK10-SQUIX	Label printer MK10-SQUIX			✓	
MK10-SQUIX-SET	Tube and label printer MK10-SQUIX with perforation unit			✓	
MK10-DH	Thermotransfer double sided printer MK10-DH				✓
MK10-DH-SET	Thermotransfer double sided printer MK10-DH with perforation cutter				✓
MK10-CK	Cleaning kit MK10 (100 cleaning swabs, 50 wipes, 250 ml roller cleaning fluid, 250 ml glass and plastic cleaning fluid)	✓	✓	✓	✓
MK10-CT	Cleaning wipes for thermal transfer printhead (10 pcs.)	✓	✓	✓	✓
MK10-EOS2-CU	Perforation cutter for MK10 (EOS2)	✓			
MK10-EOS2-KN	Cutter for MK10 (EOS2)	✓			
MK10-EOS2-EU	Roll holder for MK10 printer (EOS2)	✓			
MK10-EOS5-CU	Perforation cutter for MK10 (EOS5)		✓		
MK10-EOS5-KN	Cutter for MK10 (EOS5)		✓		
MK10-SQUIX-CU	Perforation cutter for MK10-SQUIX and MK10-DH			✓	✓
MK10-SQUIX-KN	Cutter for MK10-SQUIX and MK10-DH			✓	✓
MK10-EOS-HC	Aluminum case for MK10 (EOS2/EOS5)	✓	✓		
MK10-EOS-WIFI	USB-WLAN stick 2.4 GHz for MK10 (EOS2 i EOS5)	✓	✓		
MK10-EOS-PCT*	PCT platen roller for MK10-EOS	✓	✓		

# Ribbon recommendation tables

## For basic Partex markers

	Type PX6	Type PR8	Type DR	Type PR10
PPQ	●	○		○
PPQZ	●	○		○
PPT	●	○		○
PPD	●	○		○
PO	○	●		
POZ		○		●
PO-068	●	○		○
PP	○	○		●
PPA	○	○		●
PHZF	○		●	○
PK	●	○		
PKZ	○			●
PRZ	○			●
PCT	○	●		○

## For the ProSleeve series

	Type PX6	Type PR8	Type DR	Type PR10
SG		●	○	
HF	○	●		○
NF	○	●		○
EF	○		●	
CMM	○		●	○
CML	●	○		○
CMD			●	○
CMC	●			○
MG			●	
HZ	○	●		○
MS		○	●	
CMZ		●		○

## For labels


	Type PX6	Type PR8	Type DR	Type PR10
EPL	○			●
PLTC VINYL		○		●
PLT POLYESTER MATT		●		○
PLT POLYESTER GLOSSY		○		●
PLTF		○		●
PWT POLYESTER		○		●

How to read tables:

- Recommended as primary choice
- Recommended as secondary choice

**Example with the PPQ:** The PX6 ribbon is recommended as a first-choice ribbon in combination with product PPQ for printing on MK10 series printers. The ribbon is the best match, providing the highest print quality and durability.

**Example with the PPQ:** The PR8 and PR10 ribbons are recommended as a second-choice ribbon in combination with product PPQ for printing on MK10 series printers. The ribbon is a great match, providing good print quality and durability.

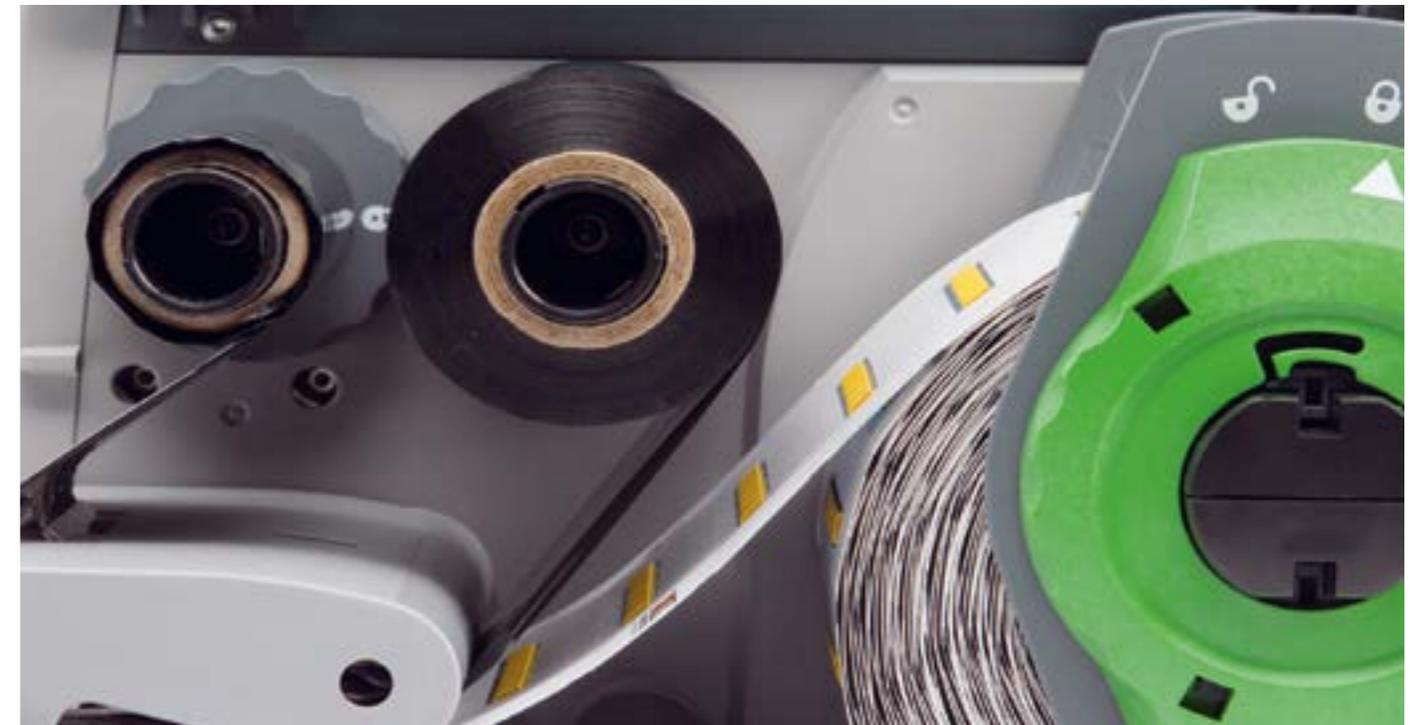

# Ribbons

## MK10-RB Thermal transfer ribbons

Partex offer a wide range of thermal transfer ribbons where each ribbon has been specially formulated to provide the highest standard of print quality and adherence when used with our range of printers.



### Type PX6

The PX6 is a premium resin formula that offers sharp printing which is ideal for bar code, fine lines and small characters. The fine line printing ability is complimented by outstanding abrasion resistance, excellent chemical (for example brake fluid) and heat resistance and image durability for most demanding, harsh environment applications.

Type	Print colour	Width [mm]	Length [m]	Package [pcs.]
MK10-RB-PX6-25	black	25	300	1
MK10-RB-PX6-55	black	55	300	1
MK10-RB-PX6-80	black	80	300	1
MK10-RB-PX6-110	black	110	300	1

Keep away from direct sunlight, high temperature and humidity.

#### Properties

**Storage temperature:**  
5°C to 35°C (41°F to 95°F)

**Humidity:**  
30% - 80%

**Shelf Life:**  
12 months

### Type DR

It is a high-performance thermo-transfer ink ribbon. Ideal for printing of logos, bar codes, text and various characters. The ribbon provides an excellent chemical and scratch resistance print result and guarantees high continuous printability also for serial production. Excellent print results. Excellent scratch and solvent resistance. High density printing.

Type	Print colour	Width [mm]	Length [m]	Package [pcs.]
MK10-RB-40300-DR	black	40	300	1
MK10-RB-80300-DR	black	80	300	1

#### Properties

**Storage temperature:**  
5°C to 35°C (41°F to 95°F)

**Humidity:**  
45% - 85%

**Shelf Life:**  
6 months at 20°C and 50% Rh.

Avoid direct sunlight.

### Type PR8

PR8 is a high performance resin ribbon designed for the most demanding applications regarding resistance to mechanical aggressions and/or temperature and/or solvents. Excellent resistance to solvents and to high temperature, smudge and scratch. Excellent printing quality. The characteristics of PR8 answer the requirements of the following application fields: pharmaceutical, cosmetics, healthcare, food contact, livestock, outdoor applications conveyor, automotive.

Type	Print colour	Width [mm]	Length [m]	Package [pcs.]
MK10-RB-PR8-25	black	25	360	1
MK10-RB-PR8-55	black	55	360	1
MK10-RB-PR8-80	black	80	360	1
MK10-RB-PR8-110	black	110	360	1

#### Properties

**Storage temperature:**  
5°C to 35°C (41°F to 95°F)

**Humidity:**  
20% - 80%

**Shelf Life:**  
12 months

### Type PR10

PR10 is a ultra-resistant resin thermal transfer ribbon that delivers exceptionally sharp print edges ensuring clear, highly durable and dense print results. It can withstand extreme conditions, offering excellent durability, resistance to solvents and mechanical wear. The resin is halogen free and can therefore be used in applications with high fire safety requirements.

Type	Print colour	Width [mm]	Length [m]	Package [pcs.]
MK10-RB-PR10-25	black	25	300	1
MK10-RB-PR10-55	black	55	300	1
MK10-RB-PR10-80	black	80	300	1
MK10-RB-PR10-110	black	110	300	1

#### Properties

**Storage temperature:**  
5°C to 35°C (40°F to 95°F)

**Humidity:**  
20% - 80%

**Shelf Life:**  
1 year (guaranteed). Under optimal storage conditions, the product's usability may extend to 2-3 years.

# Markers Printed by MK10 printers



## PCT

Open wire marker for thermal transfer printing.

## PO

Oval printable profile in a wide range of available sizes. Designed for the most popular sizes of wires and cables.

## PHZF

Multi-character marking. Flat, halogen free heat shrink for thermal transfer printers.



## PPQ / PPQZ

Multi-character marking. PPQ+ is a flat profile with pre-punched holes. Easy to mount on the cable with cable ties.

## PPT


Flag cable marker. PPT is a halogen-free marker that is mounted without cable ties.

## PPD

Flat cable marker. PPD is a diamond shaped halogen-free cable marker.

## PCT Open wire marker

Type	Height H [mm]	Width W1 [mm]	Width W2 [mm]	Width W3 [mm]	Diameter [mm] [min/max]	Cross section [mm²]	Length [mm]	Package [pcs.]
PCT 10	3.6	3.5	3.9	3.8	1.2 - 1.8	0.25 - 0.5	12 / 18 / 24	1400 / 900 / 700
PCT 20	4.0	4.5	3.9	4.8	1.8 - 2.5	0.75 - 1.5	12 / 18 / 24	1400 / 900 / 700
PCT 30	4.9	5.0	3.9	5.3	2.5 - 3.3	1.5 - 2.5	12 / 18 / 24	1400 / 900 / 700
PCT 40	5.0	5.5	3.9	5.7	3.3 - 4.0	2.5 - 4.0	12 / 18 / 24	1200 / 800 / 600



Colours:



## PPT Flag cable marker

Type	Height [mm]	Length [mm]	Cable diameter min [mm]	Cable diameter max [mm]	Package [pcs.]
PPT08010DN*	11	77	3	12	1000

\*=colour (4=yellow, 9=white, 1=brown, 2=red, 5=green, 6=blue)

Colours:



## PPD Flat cable marker

Type	Height [mm]	Length [mm]	Package [pcs.]
PPD04025DN*	25	40	650

\*=colour (4=yellow, 9=white, 1=brown, 2=red, 5=green, 6=blue)

Colours:



# Markers Printed by MK10 printers

## PO Oval wire and cable marker

Type	Type halogen free version	Diameter min/max [mm]	Cross sectional area [mm <sup>2</sup> ]	Packaging [m]
PO-01	POZ01	1.3 / 1.8	0.25	60 / 250
PO-02	POZ02	1.7 / 2.2	0.5	60 / 250
PO-03	POZ03	2.0 / 2.5	0.75	50 / 250
PO-04	POZ04	2.2 / 2.8	1	50 / 200
PO-05	POZ05	2.7 / 3.5	1.5	40 / 200
PO-06	POZ06	3.2 / 4.0	2.5	40 / 200
PO-068*	PRZ071* / PKZ2	6.8 / 7.0	-	4.5 / 25 / 50
PO-07	POZ07	3.8 / 4.7	4	30 / 100
PO-08	POZ08	4.6 / 5.5	6	30 / 100
PO-09	POZ09	5.6 / 7.0	10	50

\* mounted on POH, PKH or directly with cable tie



Colours:



## PHZF Flat halogen-free heat shrink sleeves

Type	Description	Packaging [m]
PHZF20024	flat shrink tube 2.4 / 1.2 mm	100 / 25
PHZF20032	flat shrink tube 3.2 / 1.6 mm	100 / 25
PHZF20048	flat shrink tube 4.8 / 2.4 mm	100 / 25
PHZF20064	flat shrink tube 6.4 / 3.2 mm	100 / 25
PHZF20095	flat shrink tube 9.5 / 4.8 mm	100 / 20
PHZF20127	flat shrink tube 12.7 / 6.4 mm	100 / 15
PHZF20190	flat shrink tube 19.1 / 9.5 mm	50 / 15
PHZF20254	flat shrink tube 25.4 / 12.7 mm	50 / 15
PHZF20381	flat shrink tube 38.1 / 19.1 mm	25 / 10
PHZF20504	flat shrink tube 50.8 / 25.4 mm	25 / 10



Colours:



## PPQ / PPQZ Flat cable marker with pre-punched holes


Type	Type	Height [mm]	Length [mm]	Packaging [pcs.]
PPQ+10040	PPQZ10040	10	40	500
PPQ+10060	PPQZ10060	10	60	330
PPQ+10080	PPQZ10080	10	80	250
PPQ+10100	PPQZ10100	10	100	200
PPQ+19040	PPQZ19040	19	40	500
PPQ+19060	PPQZ19060	19	60	330
PPQ+19080	PPQZ19080	19	80	250
PPQ+19100	PPQZ19100	10	100	200
PPQ+38060	PPQZ38060	38	60	330
PPQ+38080	PPQZ38080	38	80	250
PPQ+38100	PPQZ38100	38	100	200
PPQ+50080	PPQZ50080	50	80	250
PPQ+50100	PPQZ50100	50	100	200
	PPQZ06010*	10	60	1000
	PPQZ08019*	19	80	500
	PPQZ08038*	38	80	250

\* ladder style format.

PPQZ is a halogen free version.



Colours:



## PP+ / PPA+ Flat profile for marker sleeves

Type	Height [mm]	Packaging [m]	For markers
PP+046	4.6	17	PT+, PTC, PTZ, PM-10, PTM10
PP+063	6.3	17	Phoenix Contact* terminal blocks
PP+90	9	17	PM-20, PS
PP+100	10.2	17	ABB Entelec terminal blocks
PP+110	11	17	Wago (TopJobs) terminal blocks
PPA+90	9	10 / 25	Flat profile with adhesive

\* - UT2.5, UTTB2.5, ST4, DT2.5, QTC, DTI2.5



Colours:



# ProSleeve wire markers Printed by MK10 printers



## EF Extended fire resistance

Flame retardant, zero halogen, low smoke, low toxicity radiation cross linked UV stabilised and printable polyolefin sleeves used for wire identification. Shrink ratio 2:1.



## NF Diesel resistant

Heat shrink sleeve in a ladder form, measuring 3.2 - 50.8 mm before shrinking. Ideally used where resistance to organic fluids, common fuels, lubricants, and solvents properties are required. Typical use in mass transit, aerospace, industrial installations.



## MG Military grade

Military grade self-extinguishing heat shrink sleeve, measuring 2.4 - 38.1 mm before shrinking. Very flexible, high temperature rated and highly flame retardant. UL 224 and CSA compliant. Ideal for aerospace, military, rail, industrial and energy applications. Shrink ratio 3:1.



## HZ Halogen free

Heat shrink sleeve in a ladder form, measuring 2.4 - 50.8 mm before shrinking. The zero halogen material, along with its low smoke and low toxic fume emissions, makes this product ideal for enclosed spaces like mass transit, marine applications, and industrial installations.

## EF Extended fire resistance

Type	Before shrinking [mm]	After shrinking [mm]	Length [mm]	Markers across	Packaging [pcs.]
EFDG024125LR*	2.4	1.2	12.5	4	4000
EFDG024250LR*	2.4	1.2	25	2	2000
EFDG024500LR*	2.4	1.2	50	1	1000
EFDG032125LR*	3.2	1.6	12.5	4	4000
EFDG032250LR*	3.2	1.6	25	2	2000
EFDG032500LR*	3.2	1.6	50	1	1000
EFDG048125LR*	4.8	2.4	12.5	4	4000
EFDG048250LR*	4.8	2.4	25	2	2000
EFDG048500LR*	4.8	2.4	50	1	1000
EFDG064125LR*	6.4	3.2	12.5	4	4000
EFDG064250LR*	6.4	3.2	25	2	2000
EFDG064500LR*	6.4	3.2	50	1	1000
EFDG095125LR*	9.5	4.75	12.5	4	2000
EFDG095250LR*	9.5	4.75	25	2	1000
EFDG095500LR*	9.5	4.75	50	1	500
EFDG127125LR*	12.7	6.4	12.5	4	2000
EFDG127250LR*	12.7	6.4	25	2	1000
EFDG127500LR*	12.7	6.4	50	1	500
EFDG190125LR*	19	9.5	12.5	4	2000
EFDG190250LR*	19	9.5	25	2	1000
EFDG190500LR*	19	9.5	50	1	500
EFDG254250LR*	25.4	12.7	25	2	600
EFDG254500LR*	25.4	12.7	50	1	300
EFDG381500LR*	38.1	19	50	1	100

Colours:



\*=colour (4=yellow, 9=white)

## MG Military grade

Type	Before shrinking [mm]	After shrinking [mm]	Sleeve length [mm]	Packaging [pcs.]
MGD024125LR*	2.5	0.8	12.5	4000
MGD024250LR*	2.5	0.8	25	2000
MGD024500LR*	2.5	0.8	50	1000
MGD032125LR*	3.4	1	12.5	4000
MGD032250LR*	3.4	1	25	2000
MGD032500LR*	3.4	1	50	1000
MGD048125LR*	5	1.6	12.5	4000
MGD048250LR*	5	1.6	25	2000
MGD048500LR*	5	1.6	50	1000
MGD064125LR*	6.5	2	12.5	4000
MGD064250LR*	6.5	2	25	2000
MGD064500LR*	6.5	2	50	1000
MGD095125LR*	10	3	12.5	2000
MGD095250LR*	10	3	25	1000
MGD095500LR*	10	3	50	500
MGD127125LR*	13	4	12.5	2000
MGD127250LR*	13	4	25	1000
MGD127500LR*	13	4	50	500
MGD190125LR*	19.3	6	12.5	2000
MGD190250LR*	19.3	6	25	1000
MGD190500LR*	19.3	6	50	500
MGD254125LR*	25.7	8	12.5	1200
MGD254250LR*	25.7	8	25	600
MGD254500LR*	25.7	8	50	300
MGD381250LR*	38.3	12.7	25	200
MGD381500LR*	38.3	12.7	50	100

\*=colour (4=yellow, 9=white)

# ProSleeve wire markers Printed by MK10 printers

## NF Diesel resistant

Type	Before shrinking [mm]	After shrinking [mm]	Length [mm]	Markers across	Packaging [pcs.]
NFDG032125LR*	3.2	1.1	12.5	4	4000
NFDG032250LR*	3.2	1.1	25	2	2000
NFDG032500LR*	3.2	1.1	50	1	1000
NFDG048125LR*	4.8	1.6	12.5	4	4000
NFDG048250LR*	4.8	1.6	25	2	2000
NFDG048500LR*	4.8	1.6	50	1	1000
NFDG064125LR*	6.4	2.1	12.5	4	4000
NFDG064250LR*	6.4	2.1	25	2	2000
NFDG064500LR*	6.4	2.1	50	1	1000
NFDG095125LR*	9.5	3.2	12.5	4	2000
NFDG095250LR*	9.5	3.2	25	2	1000
NFDG095500LR*	9.5	3.2	50	1	500
NFDG127125LR*	12.7	4.2	12.5	4	2000
NFDG127250LR*	12.7	4.2	25	2	1000
NFDG127500LR*	12.7	4.2	50	1	500
NFDG180125LR*	18	6.4	12.5	4	2000
NFDG180250LR*	18	6.4	25	2	1000
NFDG180500LR*	18	6.4	50	1	500
NFDG254250LR*	25.4	8.5	25	2	600
NFDG254500LR*	25.4	8.5	50	1	300
NFDG381500LR*	38.1	12.6	50	1	100
NFDG508500LR*	50.8	16.9	50	1	100

\*=colour (4=yellow, 9=white)

## HZ Halogen free

Type	Before shrinking [mm]	After shrinking [mm]	Sleeve length [mm]	Packaging [pcs.]
HZD024125LR*	2.5	1.2	12.5	4000
HZD024250LR*	2.5	1.2	25	2000
HZD024500LR*	2.5	1.2	50	1000
HZD032125LR*	3.6	1.6	12.5	4000
HZD032250LR*	3.6	1.6	25	2000
HZD032500LR*	3.6	1.6	50	1000
HZD048125LR*	5.2	2.4	12.5	4000
HZD048250LR*	5.2	2.4	25	2000
HZD048500LR*	5.2	2.4	50	1000
HZD064125LR*	6.7	3.2	12.5	4000
HZD064250LR*	6.7	3.2	25	2000
HZD064500LR*	6.7	3.2	50	1000
HZD095125LR*	10	4.8	12.5	2000
HZD095250LR*	10	4.8	25	1000
HZD095500LR*	10	4.8	50	500
HZD127125LR*	13.6	6.4	12.5	2000
HZD127250LR*	13.6	6.4	25	1000
HZD127500LR*	13.6	6.4	50	500
HZD190125LR*	20.4	9.5	12.5	2000
HZD190250LR*	20.4	9.5	25	1000
HZD190500LR*	20.4	9.5	50	500
HZD254125LR*	27	12.7	12.5	1200
HZD254250LR*	27	12.7	25	600
HZD254500LR*	27	12.7	50	300
HZD381250LR*	40	19.1	25	200
HZD381500LR*	40	19.1	50	100
HZD508250LR*	50.8	25.4	25	200
HZD508500LR*	50.8	25.4	50	100

\*=colour (4=yellow, 9=white).

### Colours:



# ProSleeve cable markers Printed by MK10 printers



## CML Extended fire resistance

The CML cable marker is made from zero halogen, low toxicity, radiation cross-linked UV stabilised polyolefin. This material has been approved for London Underground for use on mass transit applications.

## CMM Military grade

The CMM cable marker is made from flame retardant polyolefin material. They have excellent UV, chemical and mechanical resistance and provide print adhesion to MIL.

## CMD Diesel resistant

The CMD cable marker is a flame retardant marker designed to survive exposure to diesel, organic fluids and oils for long periods at high temperatures, and are ideal for mass transit applications.



## CMZ Halogen free

The CMZ cable marker is extremely strong with high tear strength properties. The material is halogen free and UL94 V-0 rated. It will not break down in reaction with water and is resistant to bacterial attacks.

## CMX Detectable

Cable marker made from a TPU compound based on polyether. Compliant with EU and FDA contact requirements, is hydrolysis resistant and resistant to microorganisms. Optimized for use with the most popular metal detectors and X-ray detectors. Special ribbon needed.

## CMC Halogen free

The CMC halogen free cable marker is extremely strong with high tear strength properties. Flame retardant. Can be used in harsh environments.

## CML Extended fire resistance

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CML060010LR*	60 x 10	40 x 10	1450
CML075015LR*	75 x 15	55 x 15	1100
CML090025LR*	90 x 25	70 x 25	750

Colours:  \*colour (4=yellow, 9=white)

## CMM Military grade

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CMM060010LR*	60 x 10	40 x 10	1450
CMM075015LR*	75 x 15	55 x 15	1100
CMM090025LR*	90 x 25	70 x 25	750

Colours:  \*colour (4=yellow, 9=white)

## CMD Diesel resistant

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CMD060010LR*	60 x 10	40 x 10	1450
CMD075015LR*	75 x 15	55 x 15	1100
CMD090025LR*	90 x 25	70 x 25	750

Colours:  \*colour (4=yellow, 9=white)

## CMZ Halogen free

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CMZ060010LR*	60 x 10	40 x 10	1450
CMZ075015LR*	75 x 15	55 x 15	1100
CMZ090025LR*	90 x 25	70 x 25	750

Colours:  \*colour (4=yellow, 9=white)

## CMX Detectable

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CMX060012LR6	60 x 12	40 x 11	1000
CMX075015LR6	75 x 15	55 x 15	1000
CMX075025LR6	75 x 25	55 x 25	500

Colours: 

## CMC Halogen free

Type	Size [mm]	Text area [mm]	Packaging [pcs.]
CMC060010LR*	60 x 10	40 x 10	1000
CMC075015LR*	75 x 15	55 x 15	1000
CMC078028LR*	78 x 28	70 x 25	600

Colours:  \*colour (4=yellow, 9=white)

# Labels Printed by MK10 printers

## EPL Raised panel labels

Type	Height [mm]	Length [mm]	Packaging [pcs.]
EPL022022LR*	22	22	930
EPL027008LR*	27	8	2500
EPL027125LR*	27	12.5	2000
EPL027015LR*	27	15	1500
EPL027018LR*	27	18	1500
EPL035018LR*	35	18	1250
EPL045015LR*	45	15	1500
EPL048019LR*	48	19	1250
EPL060030LR*	60	30	500
EPL069150LR*	69	150	200
EPL070018LR*	70	18	1200
EPL080060LR*	80	60	500
EPL090045LR*	90	45	500
EPL100030LR*	100	30	500
EPL100050LR*	100	50	500
EPL100090LR*	100	90	200
EPL100140LR*	100	140	500



Colours:



\*=colour (4=yellow, 9=white, 8=silver)

## PLTF Flag labels

Type	Material	Height [mm]	Length [mm]	Packaging [pcs.]
PLTF2528066PP*	Polypropylene	28	66	2000
PLTF2530065VG*	Vinyl	30	65	2000
PLTF2856068VG*	Vinyl	56	68	1000
PLTF2528066PO9	Polyolefin	28	66	2000

Colours:




\*=colour (4=yellow, 9=white, 2=red)



## PLTC Self-adhesive continuous labels

Type	Description	Height [mm]	Packaging [m]
PLTC009000	Self-adhesive vinyl label	9	100
PLTC012000	Self-adhesive vinyl label	12	100
PLTC018000	Self-adhesive vinyl label	18	100
PLTC025000	Self-adhesive vinyl label	25	30 / 60
PLTC038000	Self-adhesive vinyl label	38	30 / 60
PLTC050000	Self-adhesive vinyl label	50	30 / 60
PLTC100000	Self-adhesive vinyl label	100	30 / 60

Colours:

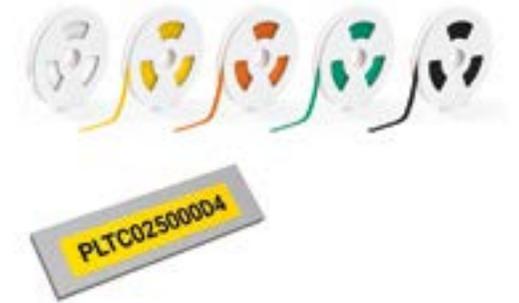

## PWT Wrap-around labels

Type	Width [mm]	Height [mm]	Packaging [pcs.]
PWT1711033	17.8	33.9	3000
PWT2316055	23	55	2400
PWT2514035	25	35	4500
PWT2519076	25	76	1800
PWT2525140	25	140	1050
PWT3225093	32	93	1500

Colours:



# Paper labels Printed by MK10 printers

## PLT Matt paper ø core 38 mm

Type	Size [mm]	Quantity on a roll [pcs.]	Quantity per package [pcs.]
PLT034015D9PM	34.0 x 15.0	2500	12500
PLT038019D9PM	38.0 x 19.0	2000	10000
PLT045023D9PM	45.0 x 23.0	2000	10000
PLT047028D9PM	47.0 x 28.0	1500	7500
PLT050030D9PM	50.0 x 30.0	1000	10000
PLT055035D9PM	55.0 x 35.0	1000	10000
PLT065035D9PM	65.0 x 35.0	1000	10000
PLT070048D9PM	70.0 x 48.0	1000	10000
PLT070150D9PM	70.0 x 150.0	400	4000
PLT080048D9PM	80.0 x 48.0	1000	10000
PLT090048D9PM	90.0 x 48.0	1000	10000
PLT101023D9PM	101.6 x 23.0	2000	10000
PLT101036D9PM	101.6 x 36.0	1000	10000
PLT101048D9PM	101.6 x 48.0	1000	10000
PLT101074D9PM	101.6 x 74.0	500	5000
PLT101098D9PM	101.6 x 98.0	500	5000
PLT101150D9PM	101.6 x 150.0	400	4000

Colours:



## PLT Matt paper ø core 76 mm

Type	Size [mm]	Quantity on a roll [pcs.]	Quantity per package [pcs.]
PLT034015B9PM	34.0 x 15.0	6000	12000
PLT038019B9PM	38.0 x 19.0	5000	10000
PLT045023B9PM	45.0 x 23.0	5000	10000
PLT047028B9PM	47.0 x 28.0	5000	10000
PLT055035B9PM	55.0 x 35.0	5000	10000
PLT065035B9PM	65.0 x 35.0	5000	10000
PLT070048B9PM	70.0 x 48.0	3000	12000
PLT070150B9PM	70.0 x 150.0	1000	4000
PLT080048B9PM	80.0 x 48.0	3000	12000
PLT090048B9PM	90.0 x 48.0	3000	12000
PLT101023B9PM	101.6 x 23.0	5000	10000
PLT101036B9PM	101.6 x 36.0	5000	10000
PLT101048B9PM	101.6 x 48.0	3000	12000
PLT101074B9PM	101.6 x 74.0	2000	6000
PLT101098B9PM	101.6 x 98.0	1500	4500
PLT101150B9PM	101.6 x 150.0	1000	4000

Colours:



# Polyester labels Printed by MK10 printers

## PLT Matt polyester ø core 38 mm

Type	Size [mm]	Quantity on a roll [pcs.]
PLT015006D*SM/3	15.0 x 6.0	10000
PLT018006D*SM/3	18.0 x 6.5	10000
PLT018009D*SM/3	18.0 x 9.0	10000
PLT020008D*SM/3	20.0 x 8.0	10000
PLT025012D*SM	25.4 x 12.7	2000
PLT025012D*SM/3	25.4 x 12.7	10000
PLT026010D*SM	26.0 x 10.0	2000
PLT026010D*SM/3	26.0 x 10.0	10000
PLT026017D*SM/3	26.5 x 17.5	5000
PLT030020D*SM	30.0 x 20.0	2000
PLT030020D*SM/3	30.0 x 20.0	6000
PLT032009D*SM	32.0 x 9.5	2000
PLT032009D*SM/3	32.0 x 9.5	10000
PLT034015D*SM	34.0 x 15.0	2500
PLT038019D*SM	38.0 x 19.0	2000
PLT038012D*SM	38.1 x 12.7	2000
PLT040020D*SM	40.0 x 20.0	2000
PLT045023D*SM	45.0 x 23.0	2000
PLT047028D*SM	47.0 x 28.0	1500
PLT050023D*SM	50.0 x 23.0	2000
PLT050030D*SM	50.0 x 30.0	1000
PLT060023D*SM	60.0 x 23.0	2000
PLT060036D*SM	60.0 x 36.0	1000
PLT065035D*SM	65.0 x 35.0	1000
PLT065053D*SM	65.0 x 53.0	750
PLT070048D*SM	70.0 x 48.0	1000
PLT076022D*SM	76.2 x 22.9	2000

Type	Size [mm]	Quantity on a roll [pcs.]
PLT076036D*SM	76.2 x 36.0	1000
PLT080048D*SM	80.0 x 48.0	1000
PLT089082D*SM	89.0 x 82.0	500
PLT090048D*SM	90.0 x 48.0	1000
PLT101023D*SM	101.6 x 23.0	2000
PLT101036D*SM	101.6 x 36.0	1000
PLT101048D*SM	101.6 x 48.0	1000
PLT101074D*SM	101.6 x 74.0	500

### Colours:



### Material and colour

\*4 - yellow; 9 - white; 8 - silver

Each roll may contain either one label or three labels (indicated in the product index as /3) with rounded corners, cut with durable adhesive.

## PLT Matt polyester ø core 76 mm

Type	Size [mm]	Quantity on a roll [pcs.]
PLT015006B*SM/3	15.0 x 6.0	10000
PLT018006B*SM/3	18.0 x 6.5	10000
PLT018009B*SM/3	18.0 x 9.0	10000
PLT020008B*SM/3	20.0 x 8.0	10000
PLT025012B*SM	25.4 x 12.7	2000
PLT025012B*SM/3	25.4 x 12.7	10000
PLT026010B*SM	26.0 x 10.0	2000
PLT026010B*SM/3	26.0 x 10.0	10000
PLT026017B*SM/3	26.5 x 17.5	5000
PLT030020B*SM	30.0 x 20.0	2000
PLT030020B*SM/3	30.0 x 20.0	6000
PLT032009B*SM	32.0 x 9.5	2000
PLT032009B*SM/3	32.0 x 9.5	10000
PLT034015B*SM	34.0 x 15.0	2500
PLT038019B*SM	38.0 x 19.0	2000
PLT038012B*SM	38.1 x 12.7	2000
PLT040020B*SM	40.0 x 20.0	2000
PLT045023B*SM	45.0 x 23.0	2000
PLT047028B*SM	47.0 x 28.0	1500
PLT050023B*SM	50.0 x 23.0	2000
PLT050030B*SM	50.0 x 30.0	1000
PLT060023B*SM	60.0 x 23.0	2000
PLT060036B*SM	60.0 x 36.0	1000
PLT065035B*SM	65.0 x 35.0	1000
PLT065053B*SM	65.0 x 53.0	750
PLT070048B*SM	70.0 x 48.0	1000
PLT076022B*SM	76.2 x 22.9	2000

Type	Size [mm]	Quantity on a roll [pcs.]
PLT076036B4SM	76.2 x 36.0	1000
PLT080048B4SM	80.0 x 48.0	1000
PLT089082B4SM	89.0 x 82.0	500
PLT090048B4SM	90.0 x 48.0	1000
PLT101023B4SM	101.6 x 23.0	2000
PLT101036B4SM	101.6 x 36.0	1000
PLT101048B4SM	101.6 x 48.0	1000
PLT101074B4SM	101.6 x 74.0	500

### Colours:



### Material and colour

\*4 - yellow; 9 - white; 8 - silver

Each roll may contain either one label or three labels (indicated in the product index as /3) with rounded corners, cut with durable adhesive.

# Polyester labels Printed by MK10 printers

## PLT Polyester ø core 38 mm

Type glossy	Type matte SEC	Size [mm]	Qty / roll [pcs.]
PLT015006D*SG/3	PLT015006DSEC/3	15.0 x 6.0	10000
PLT018006D*SG/3	PLT018006DSEC/3	18.0 x 6.5	10000
PLT018009D*SG/3	PLT018009DSEC/3	18.0 x 9.0	10000
PLT020008D*SG/3	PLT020008DSEC/3	20.0 x 8.0	10000
PLT025012D*SG	PLT025012DSEC	25.4 x 12.7	2000
PLT025012D*SG/3	PLT025012DSEC/3	25.4 x 12.7	10000
PLT026010D*SG	PLT026010DSEC	26.0 x 10.0	2000
PLT026010D*SG/3	PLT026010DSEC/3	26.0 x 10.0	10000
PLT026017D*SG/3	PLT026017DSEC/3	26.5 x 17.5	5000
PLT030020D*SG	PLT030020DSEC	30.0 x 20.0	2000
PLT030020D*SG/3	PLT030020DSEC/3	30.0 x 20.0	6000
PLT032009D*SG	PLT032009DSEC	32.0 x 9.5	2000
PLT032009D*SG/3	PLT032009DSEC/3	32.0 x 9.5	10000
PLT034015D*SG	PLT034015DSEC	34.0 x 15.0	2500
PLT038019D*SG	PLT038019DSEC	38.0 x 19.0	2000
PLT038012D*SG	PLT038012DSEC	38.1 x 12.7	2000
PLT040020D*SG	PLT040020DSEC	40.0 x 20.0	2000
PLT045023D*SG	PLT045023DSEC	45.0 x 23.0	2000
PLT047028D*SG	PLT047028DSEC	47.0 x 28.0	1500
PLT050023D*SG	PLT050023DSEC	50.0 x 23.0	2000
PLT050030D*SG	PLT050030DSEC	50.0 x 30.0	1000
PLT060023D*SG	PLT060023DSEC	60.0 x 23.0	2000
PLT060036D*SG	PLT060036DSEC	60.0 x 36.0	1000
PLT065035D*SG	PLT065035DSEC	65.0 x 35.0	1000
PLT065053D*SG	PLT065053DSEC	65.0 x 53.0	750
PLT070048D*SG	PLT070048DSEC	70.0 x 48.0	1000
PLT076022D*SG	PLT076022DSEC	76.2 x 22.9	2000

Type glossy	Type matte SEC	Size [mm]	Qty / roll [pcs.]
PLT076036D*SG	PLT076036DSEC	76.2 x 36.0	1000
PLT080048D*SG	PLT080048DSEC	80.0 x 48.0	1000
PLT089082D*SG	PLT089082DSEC	89.0 x 82.0	500
PLT090048D*SG	PLT090048DSEC	90.0 x 48.0	1000
PLT101023D*SG	PLT101023DSEC	101.6 x 23.0	2000
PLT101036D*SG	PLT101036DSEC	101.6 x 36.0	1000
PLT101048D*SG	PLT101048DSEC	101.6 x 48.0	1000
PLT101074D*SG	PLT101074DSEC	101.6 x 74.0	500

### Colours:



### Material and colour

\*4 - yellow; 9 - white; 8 - silver

SEC - Security label that leaves a "VOID" text or checkboard pattern on the surface after the label is removed. Available only in matte silver colour.

Each roll may contain either one label or three labels (indicated in the product index as /3) with rounded corners, cut with durable adhesive.

## PLT Polyester ø core 76 mm

Type glossy	Type matte SEC	Size [mm]	Qty / roll [pcs.]
PLT015006B*SG/3	PLT015006BSEC/3	15.0 x 6.0	10000
PLT018006B*SG/3	PLT018006BSEC/3	18.0 x 6.5	10000
PLT018009B*SG/3	PLT018009BSEC/3	18.0 x 9.0	10000
PLT020008B*SG/3	PLT020008BSEC/3	20.0 x 8.0	10000
PLT025012B*SG	PLT025012BSEC	25.4 x 12.7	2000
PLT025012B*SG/3	PLT025012BSEC/3	25.4 x 12.7	10000
PLT026010B*SG	PLT026010BSEC	26.0 x 10.0	2000
PLT026010B*SG/3	PLT026010BSEC/3	26.0 x 10.0	10000
PLT026017B*SG/3	PLT026017BSEC/3	26.5 x 17.5	5000
PLT030020B*SG	PLT030020BSEC	30.0 x 20.0	2000
PLT030020B*SG/3	PLT030020BSEC/3	30.0 x 20.0	6000
PLT032009B*SG	PLT032009BSEC	32.0 x 9.5	2000
PLT032009B*SG/3	PLT032009BSEC/3	32.0 x 9.5	10000
PLT034015B*SG	PLT034015BSEC	34.0 x 15.0	2500
PLT038019B*SG	PLT038019BSEC	38.0 x 19.0	2000
PLT038012B*SG	PLT038012BSEC	38.1 x 12.7	2000
PLT040020B*SG	PLT040020BSEC	40.0 x 20.0	2000
PLT045023B*SG	PLT045023BSEC	45.0 x 23.0	2000
PLT047028B*SG	PLT047028BSEC	47.0 x 28.0	1500
PLT050023B*SG	PLT050023BSEC	50.0 x 23.0	2000
PLT050030B*SG	PLT050030BSEC	50.0 x 30.0	1000
PLT060023B*SG	PLT060023BSEC	60.0 x 23.0	2000
PLT060036B*SG	PLT060036BSEC	60.0 x 36.0	1000
PLT065035B*SG	PLT065035BSEC	65.0 x 35.0	1000
PLT065053B*SG	PLT065053BSEC	65.0 x 53.0	750
PLT070048B*SG	PLT070048BSEC	70.0 x 48.0	1000
PLT076022B*SG	PLT076022BSEC	76.2 x 22.9	2000

Type glossy	Type matte SEC	Size [mm]	Qty / roll [pcs.]
PLT076036B*SG	PLT076036BSEC	76.2 x 36.0	1000
PLT080048B*SG	PLT080048BSEC	80.0 x 48.0	1000
PLT089082B*SG	PLT089082BSEC	89.0 x 82.0	500
PLT090048B*SG	PLT090048BSEC	90.0 x 48.0	1000
PLT101023B*SG	PLT101023BSEC	101.6 x 23.0	2000
PLT101036B*SG	PLT101036BSEC	101.6 x 36.0	1000
PLT101048B*SG	PLT101048BSEC	101.6 x 48.0	1000
PLT101074B*SG	PLT101074BSEC	101.6 x 74.0	500

### Colours:



### Material and colour

\*4 - yellow; 9 - white; 8 - silver

SEC - Security label that leaves a "VOID" text or checkboard pattern on the surface after the label is removed. Available only in matte silver colour.

Each roll may contain either one label or three labels (indicated in the product index as /3) with rounded corners, cut with durable adhesive.

# Promark Creator

## General Information

Promark Creator is a highly efficient tool for designing and managing marker production. Its intuitive interface allows users to seamlessly select markers with precise parameters. The program also simplifies the design of complex descriptions with its advanced editor for imported data. It is essential for designers and invaluable for both Partex printer users and those who prefer pre-sorted markers delivered directly to the construction site.

## System Requirements

**Operating system:** Windows 7 or newer  
**CPU speed:** minimum 2GHz  
**RAM size:** minimum 2GB  
**Software:** NET Framework 4.6.2 or newer  
**Resolution:** 1366x768 or higher

### Promark Creator has two versions:

**DESIGN** – a free version with no time limits, intended for system designers and those preparing technical documentation such as cable, wire, connector, and electrical component markings. This version supports the design of even the most complex descriptions. It allows flexible configuration of imported data and includes an advanced editor with a range of formatting features.

**DESIGN AND PRINT** – includes all the features of the design version, with the added capability to print. This version allows users to print names on multiple devices and different profiles simultaneously while working on other documents. DESIGN AND PRINT is a licensed version that operates on a renewable annual subscription.

## Key Features

### Marking data import wizard

Easily create custom marker projects by selecting relevant data from hundreds of parameters found in project documentation. Customize your markers with your own text, symbols, or numbers. You can also adjust the appearance of each marker during the data import stage to ensure it meets your specific requirements. Import data quickly from various sources, including industry-leading design software such as SEE Electrical and Eplan, streamlining your workflow and enhancing accuracy.

### Visual design

With Promark Creator, you can preview markers exactly as they will appear on print, eliminating the need for test prints. The software ensures that what you see on your screen is precisely what will be printed.

### Design and print

Maximize efficiency by designing new projects while simultaneously printing existing ones, without any downtime.

### Multi printing


Promark Creator allows the simultaneous printing of multiple projects on different devices. This means you can print markers for various wire diameters, cables, or electrical components in one go without needing to change the printing media.

### Virtual printing

If you don't have a printer, you can send your project directly to Partex's production line for printing. Once completed, the finished markers will be sent directly to your location.

### Design, save and send

Create projects in one department and send them for printing to other departments or even directly to the construction site – wherever a dedicated printer is located.

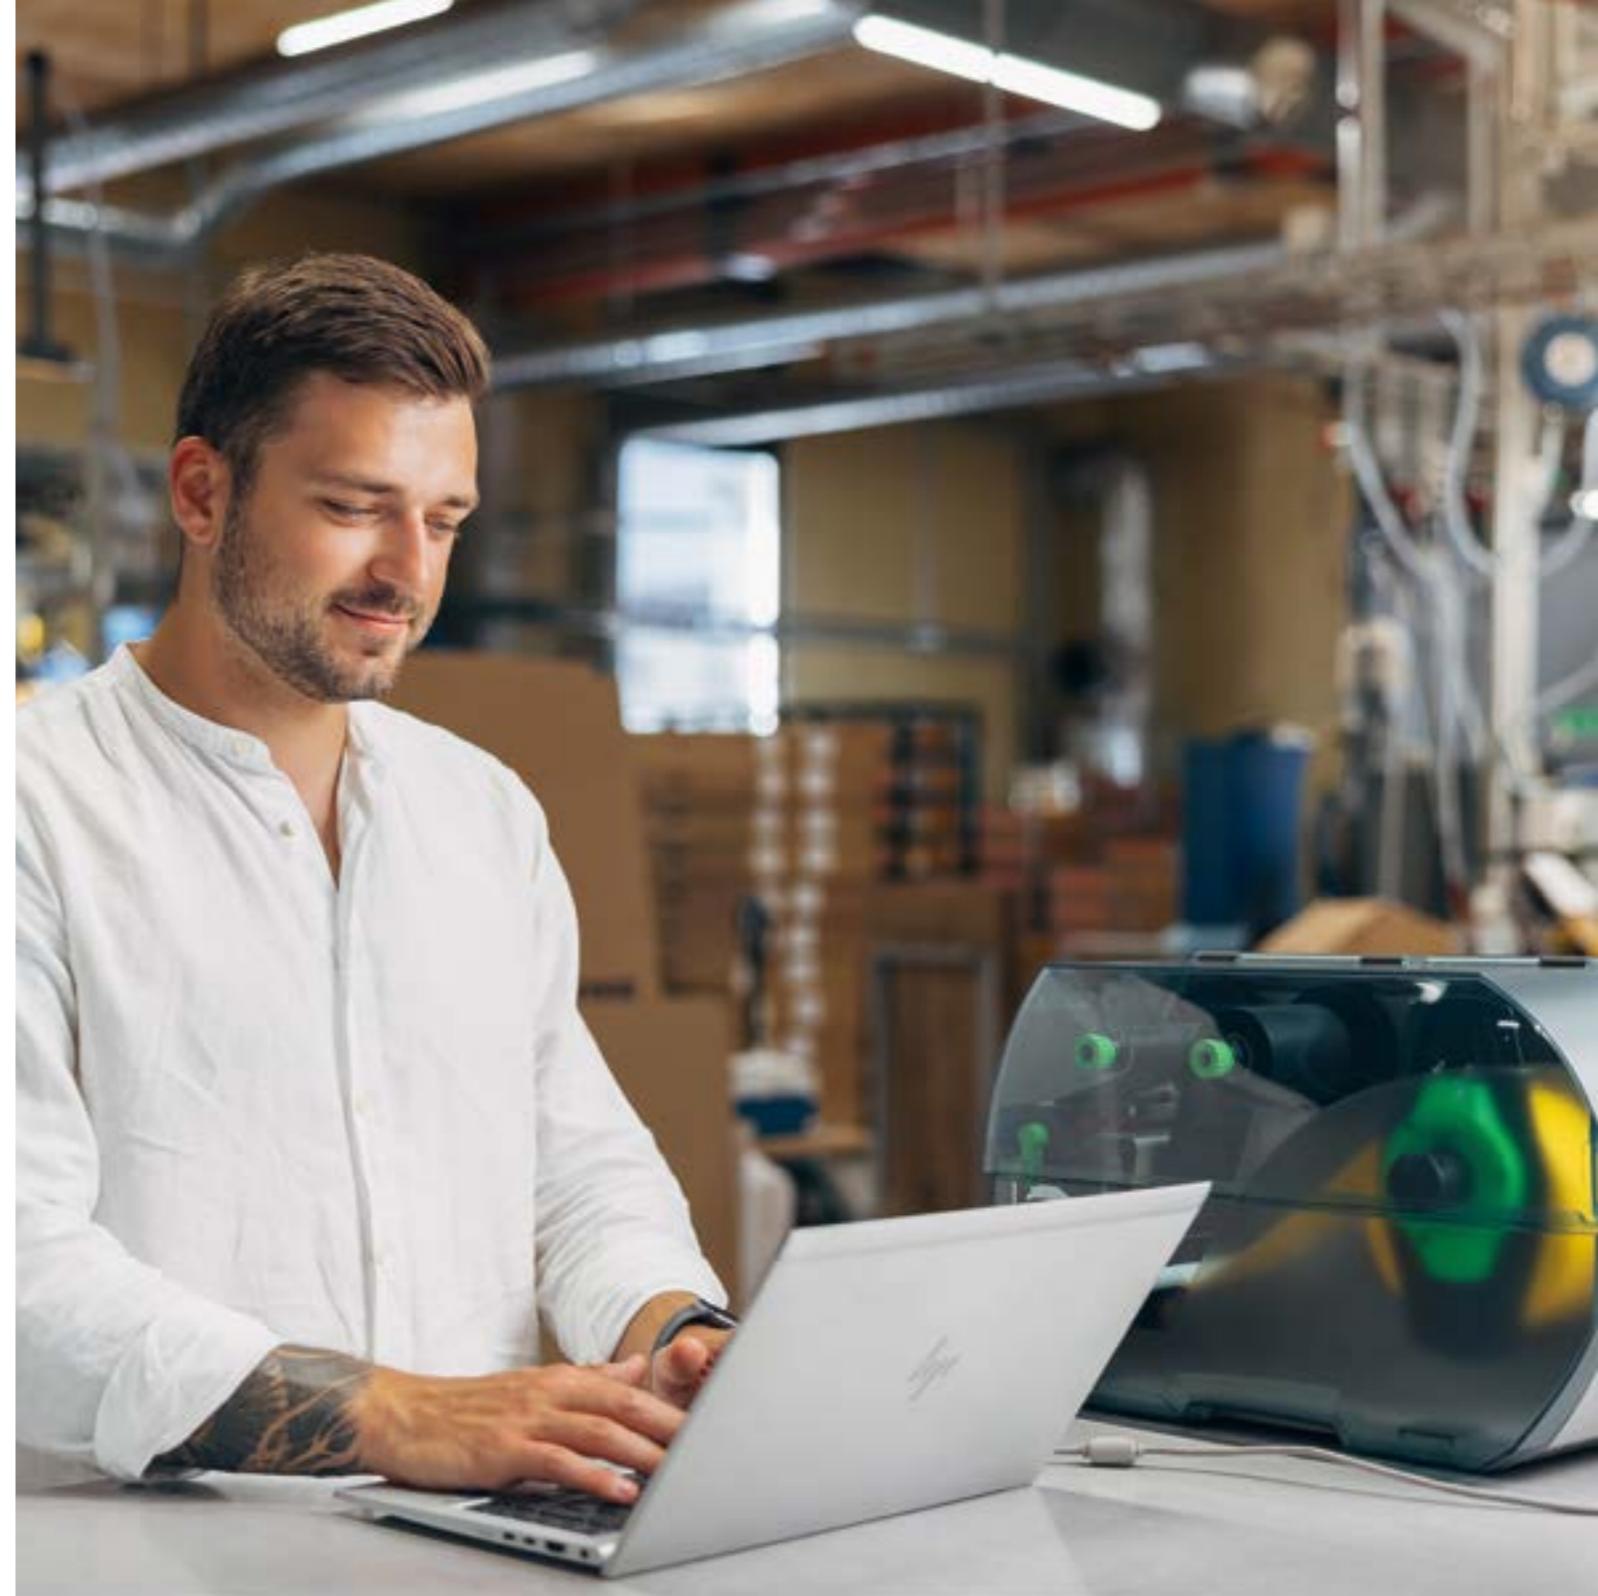

# We mark the future

We commit to making decisions with the future in mind, by investing in sustainable materials and improvements in production, by supporting our communities and employees, and by safe-guarding our customers' investments and innovation. We mark the future. A simple promise with a big meaning.

The simple purpose of a cable marker is to identify it, so you know where it comes from and where it goes to. We believe the same goes for businesses and people — you need to know where you've come from and where you're going.

Where we have come from is the small town of Gullspång in Sweden, a family business since 1948, not only by ownership but in how we operate. Today we have evolved into an expert with a global reach in the marking industry. We call ourselves a 75-year-old start-up because we have the energy and ambition of a start-up together with a heritage valuing loyalty and respect. As we continue to grow we are committed to staying humble and hungry.

Where we are going is further out into the world. There is a lot at stake, and we want to protect the things essential for the future - life, time and resources. In a business that gets bolder with age; we want to be the humble expert, always ready to meet our customers' needs and supporting a safer electric future. Whatever you are building, let us mark it for now and the future.



