PPQZ

CABLE MARKER

- Flat cable marker with pre punched holes
- Halogen free material
- Easy mounted on the cable with cable ties
- Printed in Partex marking machine MK10.

General information

Design
PPQZ is a flat profile with pre punched holes. The profile is delivered semi cut on reels for printing in Partex MK10 system or as a ready printed marker.

For printing in Partex MK10 the profile is delivered on DN-reels with 300 markers per reel (20m).

PPQZ is easily mounted on a cable with cable ties.

Print
Thermal transfer print with Partex MK10.

Technical specification

Material
Zerex, polyether-type thermoplastic polyurethane compund.

Colour
White and yellow

Temerature range
–30°C till +90°C (–22ºF to +194ºF).

Product perfomance
Flame retardant according UL94-V0@0.4

Product and order information

Profile			
Article number	**Information**	**Marker length**	**Qty/roll**
PPQZ10040DN*	Flat profile, W: 10mm L: 40mm	40mm	20m
PPQZ10060DN*	Flat profile, W: 10mm L: 60mm	60mm	20m
PPQZ10080DN*	Flat profile, W: 10mm L: 80mm	80mm	20m

** = the product is available in yellow and white. 4 for yellow, and 9 for white.*

Technical data

Properties	Unit	Value	Test method
Density	g/cm³	1.19	ASTM D-792
Thickness	mm	1,00	
Hardness	Shore A	90	ASTM D-2240
Tensile strength	MPa	13.8	ASTM D-412
Elongation at break	100%	6.9	ASTM D-412

The data above is approximate values and should only be considered as indicative.
** = value of density is dependent on the color of the foil.*

Application

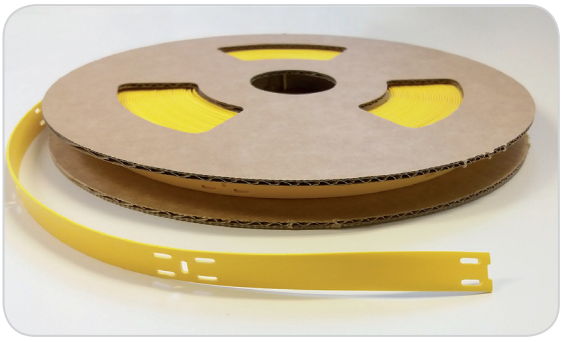

PPQZ is available in 10mm width for printing in Partex MK10

PPQZ in mounted with cable ties.